

21-998-3016-00


NOTES:


Materials:

Beryllium Copper per ASTM-B-196, QQ-C-530
PTFE Fluorocarbon PER ASTM-D-1710

Finish:

Center Conductors, Body and solder components shall be plated per MIL-G-45204
Type II, Class 1 over Nickel plate per QQ-N-290.

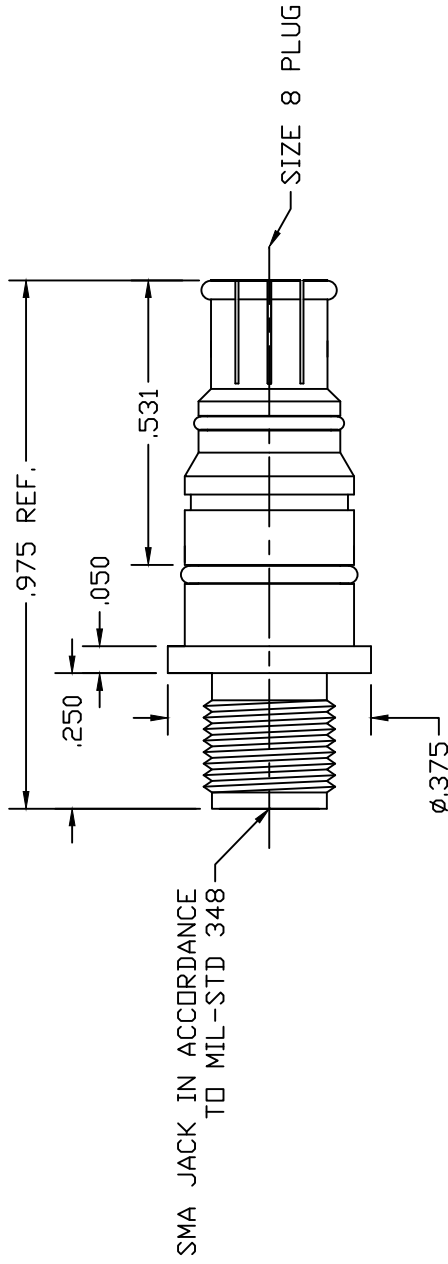

LTR	DESCRIPTION	DATE	APPR.	DRAWN	L M W	CHECKED	USED ON	 SRI CONNECTOR GAGE CO. 751 NORTH DRIVE MELBOURNE FL. 32934	
-	REL			APPR.		SCALE	21-998-3016-00		
				UNLESS OTHERWISE SPECIFIED: 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R. MAX 3. CHAMFER 1st & LAST THREADS 45° 4. SURFACE FINISHED 32/ UNLESS OTHERWISE SPECIFIED. 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .002 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING.			TITLE	SMA JACK TO SIZE 8 PLUG	
				DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ±.030 .XX ±.010 .XXX +.005 FRACTIONAL ± 1/64 ANGULAR X° ±10' X'X' ±15'			MATERIAL		
							FINISH		
				SIZE	A	FSCM NO.	OHMO1	SHEET	1
								DWG. NO.	21-998-3016-00