REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	05/01/04	UPDATE DRAWING FORMAT

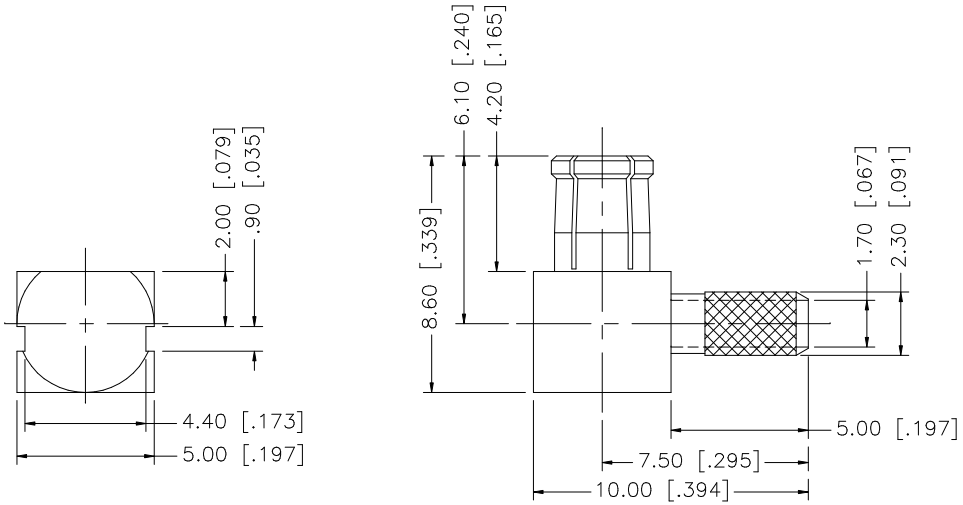

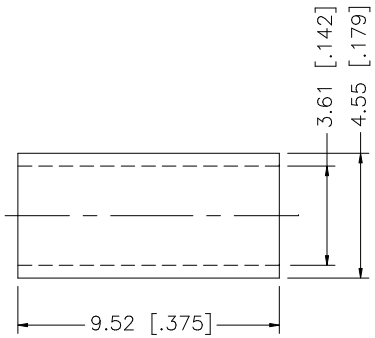

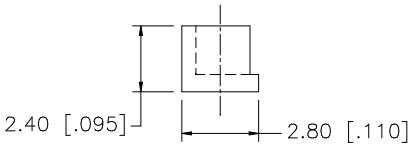



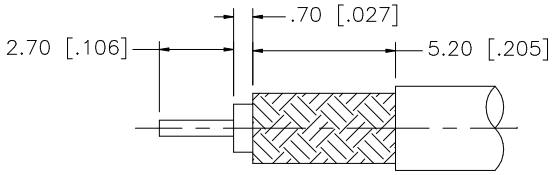

RECOMMENDED CABLE
STRIPPING DIMENSIONS

NOTE:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

8				
7				
6	FERRULE	COPPER	GOLD	1
5	COVER	BRASS	GOLD	1
4	INSULATOR	DELRIN	NATURAL	1
3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BER. COPPER	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	05/01/04
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/252/252119.DWG

Amphenol Connex

PART DESCRIPTION
MCX R/A CRIMP PLUG
(FOR RG-316U/D)

PART NO. 252119

DWG. NO.	REV.	SIZE	SCALE
252119.DWG	B	A	NA