

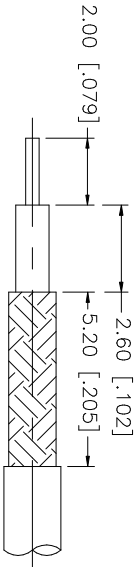





DESCRIPTION		
REV.	DATE	
NC	05/24/05	INITIAL RELEASE
A	04/19/06	UPDATE DRAWING FORMAT

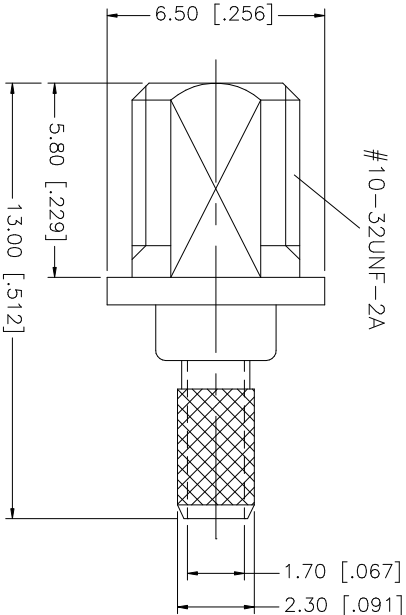

RECOMMENDED CABLE
STRIPPING DIM'S.

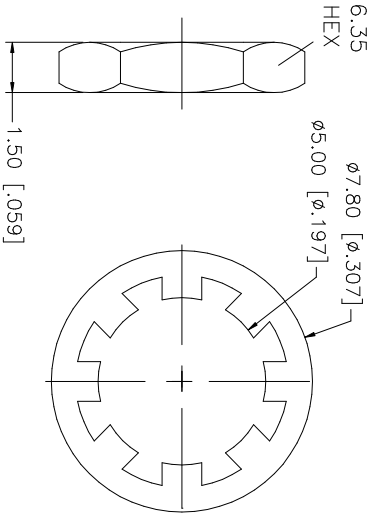

RECOMMENDED
MOUNTING HOLE

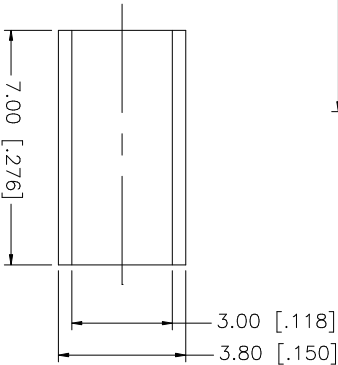

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex MMCX BULKHEAD CRIMP JACK (FOR RG-174/U, 188/U, 316/U CABLE)		
7	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm	DRAWN	G.R.S.		04/19/06	
6	HEX NUT	BRASS	NICKEL	1		CHECKED				
5	LOCK WASHER	BRASS	NICKEL	1		ISSUED				
4	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1			
3	CONTACT PIN	BER. COPPER	GOLD	1						
2	INSULATOR	TEFLON	NATURAL	1						
1	BODY	BRASS	NICKEL	1						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/262/262121.DWG			
						DWG. NO.	262121.DWG		REV. A	SIZE A

Amphenol Connex

MMCX BULKHEAD CRIMP JACK
(FOR RG-174/U, 188/U, 316/U CABLE)

262121

262121.DWG

REV. A

SIZE A

SCALE NA