REV.	DATE	DESCRIPTION
A	04/04/01	UPDATE STRIPPING AND FERRULE DIMS
B	06/30/05	UPDATE DRAWING FORMAT

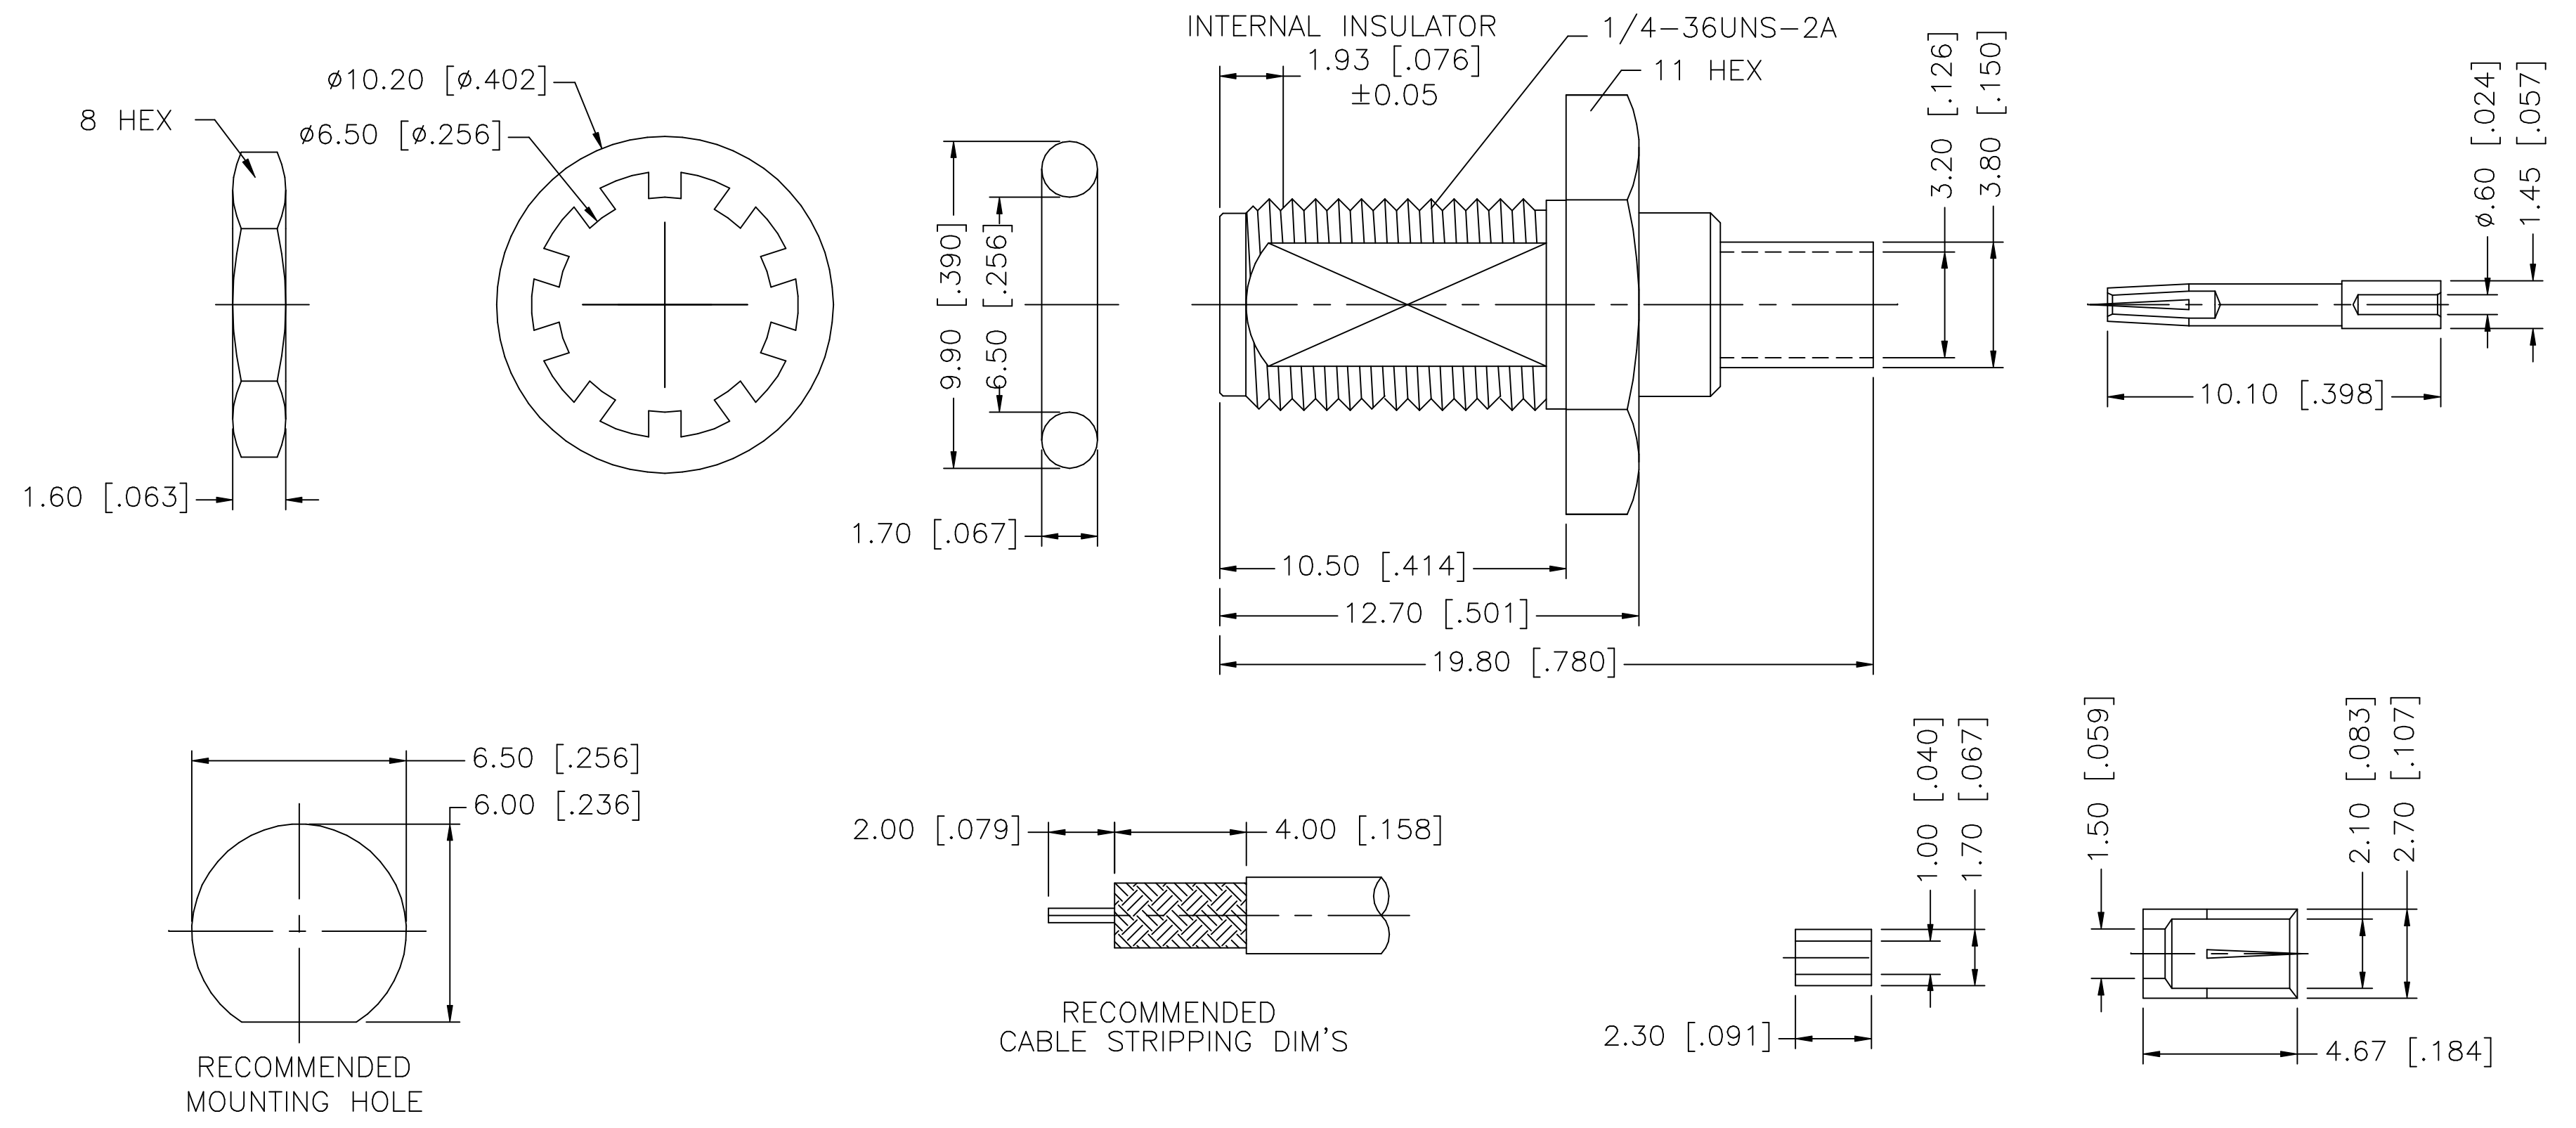
8 HEX
1.60 [.063]
ø10.20 [ø.402]
ø6.50 [ø.256]
9.90 [.390]
6.50 [.256]
1.70 [.067]
INTERNAL INSULATOR
1.93 [.076]
±0.05
1/4–36UNS–2A
11 HEX
3.20 [.126]
3.80 [.150]
10.50 [.414]
12.70 [.501]
19.80 [.780]
ø.60 [.024]
1.45 [.057]
10.10 [.398]
6.50 [.256]
6.00 [.236]
RECOMMENDED
MOUNTING HOLE
2.00 [.079]
4.00 [.158]
RECOMMENDED
CABLE STRIPPING DIM'S
1.00 [.040]
1.70 [.067]
2.30 [.091]
1.50 [.059]
2.10 [.083]
2.70 [.107]
4.67 [.184]

CRIMP NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7	FERRULE	COPPER	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	GASKET	SILICONE	RED	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	06/30/05
CHECKED		
ISSUED		
SHEET	1 OF 1	

CAD FILE C:/132/132286.DWG

Amphenol Connex

PART DESCRIPTION
SMA BULKHEAD CRIMP JACK O–RING SEAL
(FOR RG–178B/U, 196A/U CABLE)

PART NO. 132286

DWG. NO.	REV.	SIZE	SCALE
132286.DWG	B	A	NA