

GPSoF1

Description

The GPS-over-Fiber Links offer a very high stability in addition to excellent performance in phase noise and frequency jitter in applications such as remote antenna connection in GNSS receiving systems.

Features

- For GPS, Galileo, Glonass, BeiDou, IRNSS, QZSS and other GNSS systems
- No external control circuits required
- Efficient analog signal to optical convert and back



Order Information

Item Description	Item Number
GPSoF1 (TX) [LC/PC L1+L2]	85135572
GPSoF1 (RX) [LC/PC L1+L2]	85135573
GPSoF1 - 1.5 GHz (TX) [FC/APC L1 only]	85065409
GPSoF1 - 1.5 GHz (RX) [FC/APC L1 only]	85065397
GPSoF1 - 1.5 GHz (TX) [FC/APC L1+L2]	85072905
GPSoF1 - 1.5 GHz (RX) [FC/APC L1+L2]	85072906
GPSoF1 (TX) [LC/PC] IP66 AC	85145805
GPSoF1 (TX) [LC/PC] IP66 DC	85145804
GPSoF IP66 Mastmount Kit	85154592

Electrical Data

Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case temperature T _c , unless otherwise specified					
GNSS band			L1+L2		L1 only versions available see order information
Gain	dB	4	7	10	
Gain flatness	dB		< 2		
Noise figure	dB		14		
Max. input at 1dB compression	dBm		-20		
Max. input power for no damage	dBm		+15		
VSWR (input and output)			< 1.8		
Time delay TX ¹	ns		5.4		
Time delay RX ¹	ns		5.4		
Time delay single mode fiber (1310nm) ¹	ns/m		4.9		
Supply voltage V _S (Transmitter)	VDC	+ 12	+ 12	+ 15	Max. 170 mA
Supply voltage V _S (Receiver)	VDC	+ 12	+ 12	+ 15	Max. 100 mA
Supply voltage V _S (Transmitter 85145805)	VAC	100		240	5m cable, end open
Supply voltage V _S (Transmitter 85145804)	VDC	18	48	75	5m cable, end open
Temperature range operating	°C	- 5		+ 55	
Temperature range storage	°C	- 40		+ 85	
RF input impedance	Ohm	50			
Module weight	kg / lbs	0.27 / 0.6			Transmitter and Receiver
Module dimensions	mm / inches	90 x 95 x 23 / 3.5 x 3.7 x 0.9			Transmitter and Receiver
RF connectors		SMA female			
¹ Total link time delay calculation: Total delay [ns] = time Delay TX [ns]+ time Delay RX [ns]+ time delay single mode fiber 1310nm [ns/m] * link length [m] Example 100m link delay = 5.4 ns + 5.4 ns + 100m * 4.9 ns/m = 500.8 ns					

Optical Data

Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case temperature T _c , unless otherwise specified					
Fiber optic connectors		LC/PC			simplex
Fiber		standard single mode 9/125 um			
Optical power in fiber	mW	6	8	10	
Side mode suppression ratio	dB	30	40		


GPSoF1

Mechanical Data

GPSoF1 (TX)

Dimensions outline drawing: DOU-00398603


Input	Output	Description	Interface
X		GPS In	SMA (female)
	X	FO Out	LC/PC (bulkhead)
X		12 VDC In	

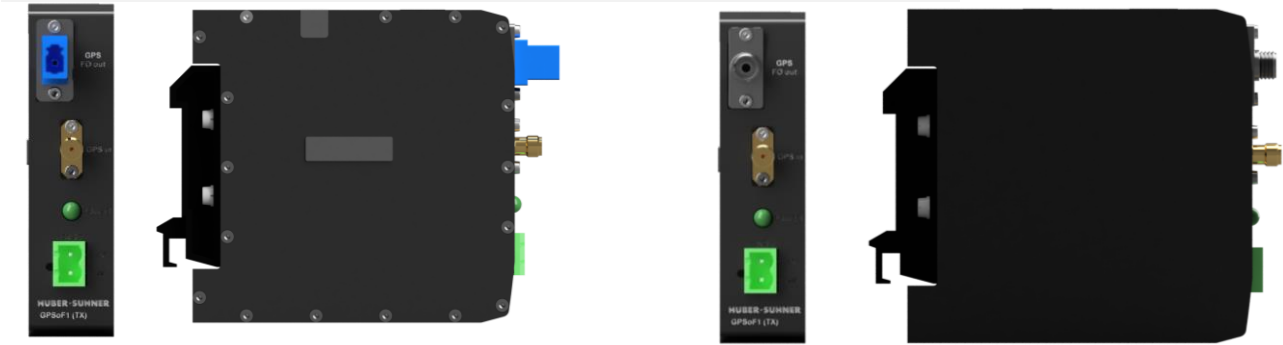

GPSoF1 (TX) IP66 and Mastmount Kit

Mastmount installation kit for GPSoF1 (TX) IP66 products. Allows to install the GPSoF1 IP66 box on masts with 3.8 cm (1.5 inch) up to 38.1 cm (15 inch) diameter. The kit includes two support plates and pipe clamps for simple installation.

Input	Output	Description	Interface
X		GPS In	SMA (female)
	X	FO Out	LC/PC (bulkhead) / cable feedthrough
X		Power IN (AC or DC)	cable feedthrough (5m cable end open included)

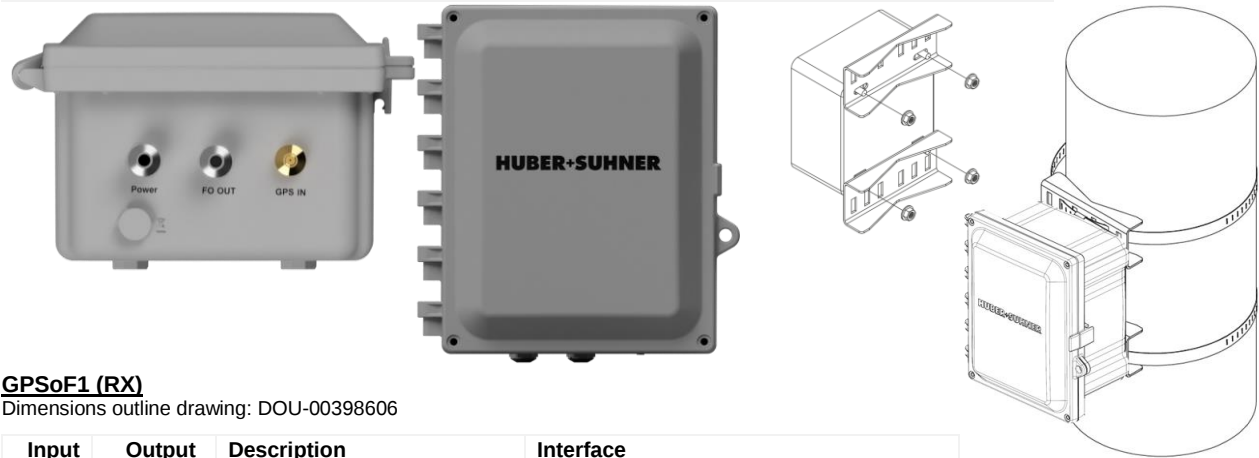

GPSoF1 (RX)

Dimensions outline drawing: DOU-00398606

Input	Output	Description	Interface
	X	GPS Out	SMA (female)
X		FO In	LC/PC (bulkhead)
X		12 VDC In	



HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 und IRIS www.hubersuhner.com

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.