CATALOG NUMBER 1F1H2-1183-01

MATERIAL AND FINISH


FLANGE AND HOUSINGS: CRES 303; PASSIVATED

CENTER CONTACT: BeCu; GOLD PLATE 75 MICROINCHES TYPICAL

OVER NICKEL PLATE 100 MICROINCHES TYPICAL

DIELECTRICS: VIRGIN PTFE

SPRING: 17-7 PH STAINLESS STEEL

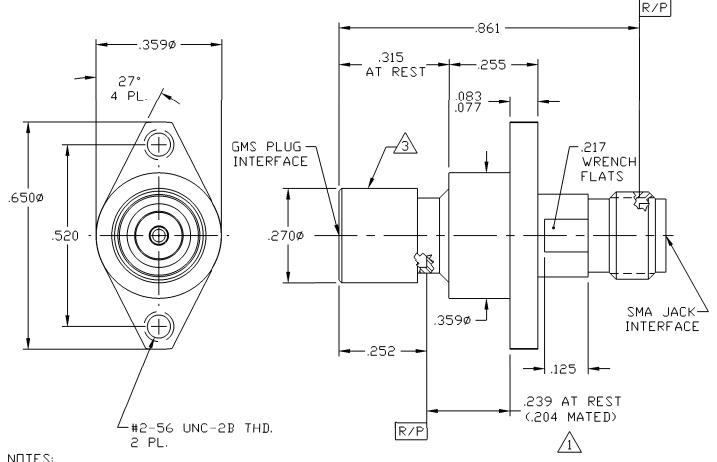

NDTES:

/1.ackslashTHE .204 RECOMMENDED MATED DIMENSION ALLOWS .035 AXIAL FLOAT IN BOTH DIRECTIONS.

2. RADIAL FLOAT: .020 MIN.

AXIAL FLOAT: .070 MIN.

/3\ MARKED PER NGC SCD 587R501.

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Glbert Inc.

| GMS PLUG FLOAT MOUNT TO SMA JACK | | IDENT CODE: 82316 REVISION: B1 | Corning Gilbert Inc. |
|--|-----------|--------------------------------------|----------------------|
| SOURCE FILE: SK-2786 | DWG. N□.: | OL-1F1H2-1183-01 | ASSY. PROC.: - |