


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

PART NO.

RFB-1131

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	CZS	4/26/99	JDMc

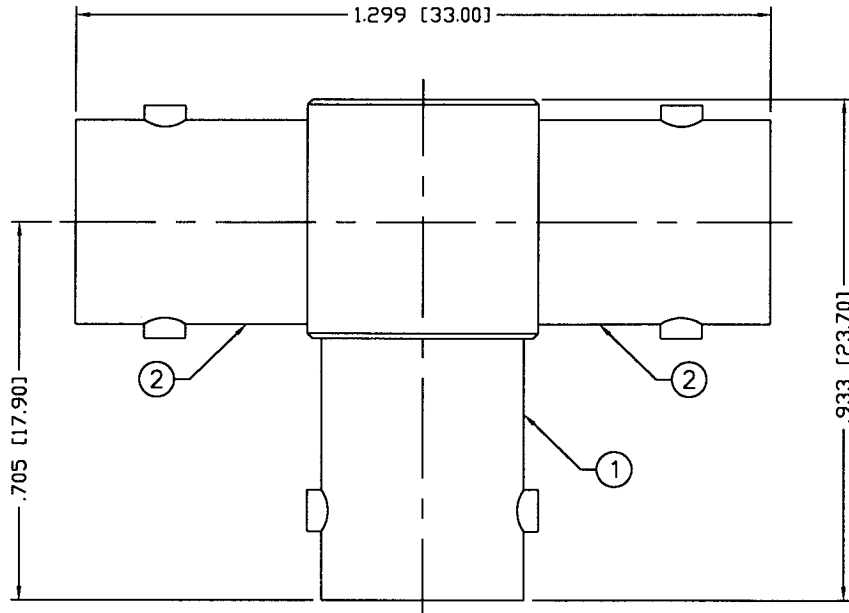

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-4 GHz
 WORKING VOLTAGE: 500 V rms @ sea level
 TEMPERATURE RANGE: -65°C TO 165°C
 INSULATION RESISTANCE: 5k M Ohms min.

1	BODY	1	BRASS	NICKEL, 100μ"
2	PRESS BODY	2	BRASS	NICKEL, 100μ"
3	INSULATOR	2	PTFE	----
4	CONTACT	1	PHOS BRONZE	SILVER 200μ"
5	CONTACT	1	PHOS BRONZE	SILVER 200μ"
6	INSULATOR	1	PTFE	----
7	LOCK RING	1	BRASS	NICKEL, 100μ"
8	SLEEVE	1	DELTRIN	----
9				
10				
11				
12				
13				
14				
#	DESCRIPTION	QTY	MATERIAL	FINISH

008974		
DRAWN	C. ZUNIGA	11/5/03
CHECKED	<i>[Signature]</i>	11/5/03
ORJ DRAWN	C. ZUNIGA	11/5/03
APPROVALS	DATE	

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS	DIAMETER
----------	----------

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

BNC TRIPLE JACK

"T" ADAPTER

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFB-1131	-

SCALE: NTS CAD FILE OUTLINE SHEET 1 OF 1