"A" INTERFACE
FULL DETENT
LIMITED DETENT
SMOOTH BORE

MATERIAL AND FINISH

HOUSING AND SHROUD:


CRES 303; PASSIVATED

ADAPTER AND CONTACT:

BeCu; GOLD PLATE 50-100 MICROINCHES OVER NICKEL PLATE 50 MICROINCHES MIN.

DIELECTRICS: VIRGIN PTFE



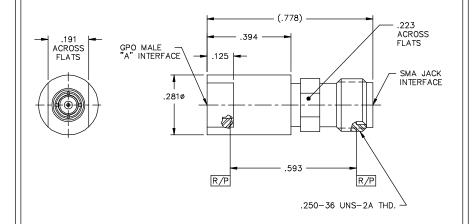

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert inc.

GPO MALE TO SMA JACK ADAPTER (TAB DETENT)		IDENT CODE: 82316 REVISION: C	Coming Gilbert		ert Inc.	
SOURCE FILE: MECR# 916	DWG. NO.:	OL-	-1AXF1-0503-0	1	ASSY. PROC.:	_