


TITLE	PART No.	REV	PAGE
110 Ohm Shielded Twisted Pair	<b>110SP-05</b>	4	1 of 1

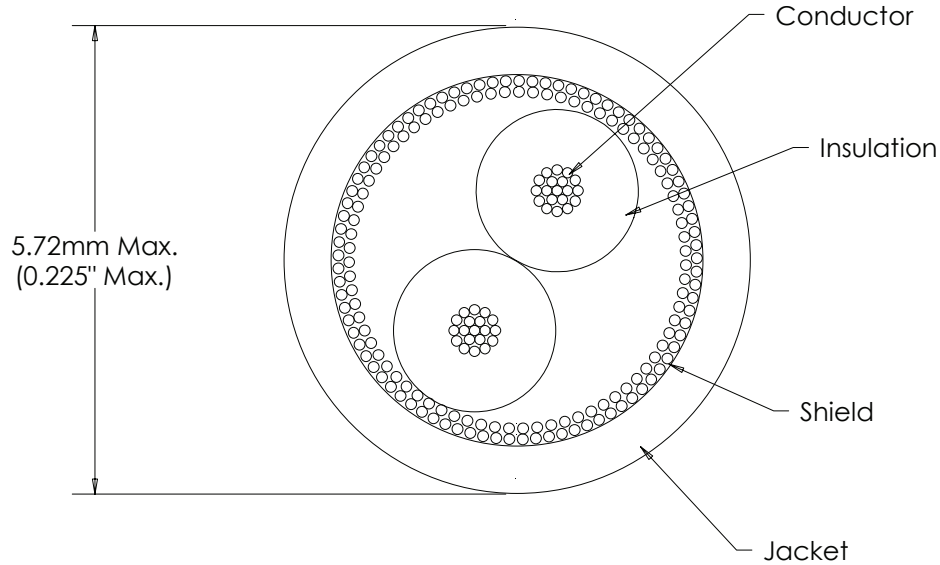

**NOTES**

- Conductor: 24 AWG, 19/36, SPC
- Insulation: FEP, 0.075" Diameter
- Color Code: One Blue, One White
- Lay Length: 0.75" (1.33 Twists per Inch)
- Braid Shield: 36 AWG SPC, >95% Coverage
- DC Resistance: 6.5 ohms/1000 ft Nom.
- Jacket: FEP, 0.015" Wall Thickness
- Color: Clear or White
- Impedance: 110 +/- 10 Ohms (Differential)
- Propagation Delay: 1.45 +/- 0.01 ns/ft
- Capacitance: 13 pF/ft

This document is the property of TEMP-FLEX. If may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	3	1646	Changed Customer Rev. from B to C.	KP	3/23/09
	4	2837	Update Specification.	KP	1/3/12
	4	3713	Update Specification Template.	KP	3/5/14