


SC Sureform® Soldered Braid Coaxial Cable

Proprietary "Soldered Braid" Shield Configuration

Harbour's Sureform® Coax cables are manufactured with a proprietary shield configuration consisting of a lead-free metallic alloy saturated braid. The resulting design yields low attenuation and the highest possible shielding effectiveness of any non-rigid coaxial cable. Harbour's Sureform® soldered braid coax allows for routing in extremely tight areas, and the cable retains its shape once it's formed. Sureform® coaxial cables can be used with standard connectors designed for semi-rigid coax.

Applications

Harbour's Sureform® cables are ideal for internal wiring of electronic equipment, delay lines, radar, avionics, and other high frequency applications. Harbour's SC75086 cable has been designed for video applications such as internal wiring of cable television amplifiers, repeaters, and broadcast equipment.

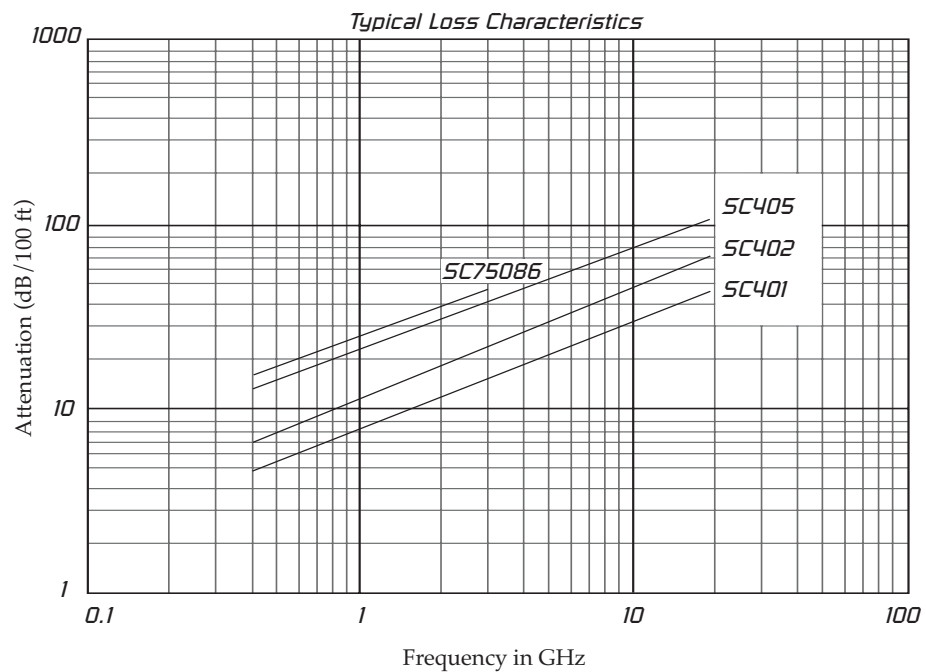

SC Sureform® Soldered Braid Coaxial Cable


Construction:

Center Conductor: solid silver plated copper
or silver plated copper clad steel

Dielectric: solid PTFE

Outer Conductor: tin saturated braid

Jacket: unjacketed, PVC or FEP



Physical Characteristics:

		Catalog Numbers			
SCCS center conductor	-unjacketed	--	SC402	SC405	SC75086
	-PVC jacketed	--	SC402PJ	SC405PJ	SC75086PJ
	-FEP jacketed	--	SC402FJ	SC405FJ	SC75086FJ
SPC center conductor	-unjacketed	SC401	SC402SPC	SC405SPC	SC75086SPC
	-PVC jacketed	SC401PJ	SC402SPC-PJ	SC405SPC-PJ	SC75086SPC-PJ
	-FEP jacketed	SC401FJ	SC402SPC-FJ	SC405SPC-FJ	SC75086SPC-FJ
Center conductor diameter		.0659"	.037"	.0201"	.0113"
Dielectric diameter		.209"	.117"	.064"	.064"
Diameter over braid		.245"	.139"	.085"	.085"
Overall diameters	-unjacketed	.245"	.139"	.085"	.085"
	-PVC jacketed	.284"	.179"	.110"	.110"
	-FEP jacketed	.272"	.169"	.106"	.106"
Min. recommended bend radius	-unjacketed	0.75"	0.43"	0.25"	0.25"
	-PVC jacketed	1.25"	0.75"	0.45"	0.45"
	-FEP jacketed	1.00"	0.70"	0.43"	0.43"
Operating temperature range (° C)		-40 +165	-40 +165	-40 +165	-40 +165
Electrical Characteristics:					
Impedance (ohms)		50	50	50	75
Capacitance (pF/ft.)		29.4	29.4	29.4	19.0
Velocity of propagation (%)		70	70	70	70
Attenuation (dB/100 ft)		Typ / Max	Typ / Max	Typ / Max	Typ / Max
@ 400 MHz		4.4 / 4.6	7.4 / 7.6	12.7 / 13.1	15.0 / 16.7
1 GHz		7.6 / 8.2	12.5 / 13.1	21.8 / 23.0	25.0 / 28.0
2 GHz		11.5 / 13.0	18.0 / 19.0	31.0 / 34.0	39.0 / 43.0
2.4 GHz		12.5 / 14.0	20.0 / 21.6	34.0 / 38.0	42.0 / 47.1
3 GHz		14.4 / 16.0	24.0 / 27.0	39.0 / 43.0	47.0 / 52.7
5 GHz		20.0 / 22.0	33.0 / 36.0	53.0 / 57.0	- / -
10 GHz		32.0 / 34.0	49.0 / 54.0	78.0 / 86.0	- / -
18 GHz		46.0 / 51.0	72.0 / 78.0	111.0 / 119.0	- / -
Cut-off frequency (GHz)		18.0	32.0	60.0	68.0
Shielding effectiveness		< -110 dB	< -110 dB	< -110 dB	< -110 dB

All figures referenced above are nominal unless otherwise specified.