


Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.011" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.033" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.039" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.049" (nominal)
5 – Jacket	Extruded FEP	0.060+/-0.003"
	Extruded Polyurethane	NA

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	75% Nominal
Delay	1.25 ns/ft
Capacitance	32. pF
Maximum Frequency	18Ghz

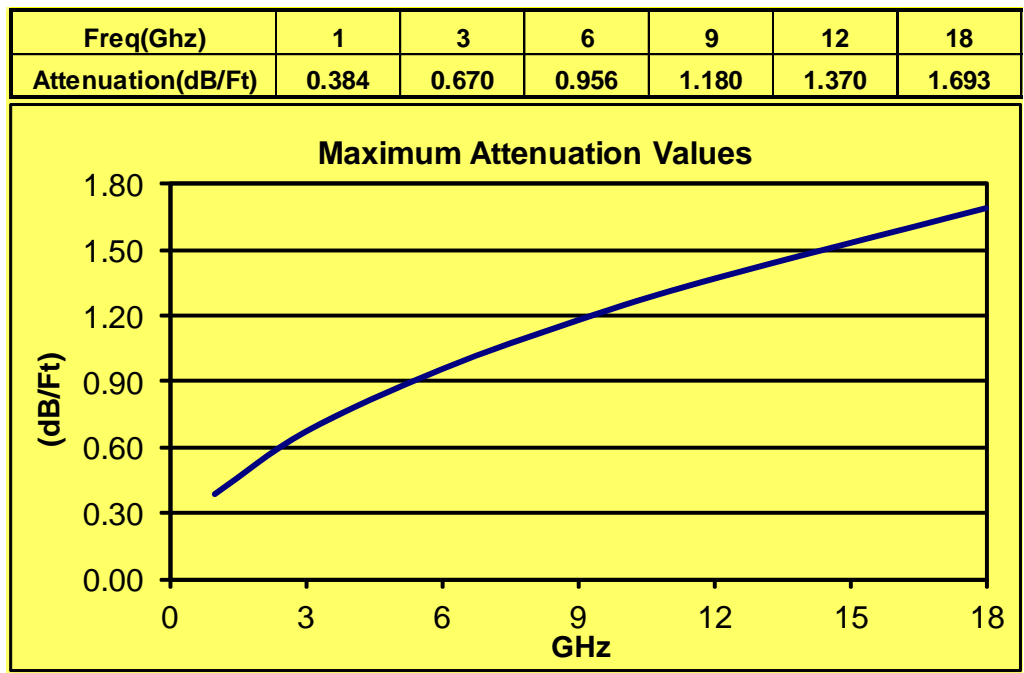

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION		SW060 WORK INSTRUCTIONS	
DATE	3/12/2012		SIZE	A
DRAWN BY	J. Vidallon		RoHS	COMPLIANT
REVISD	6/9/2015		DOCUMENT	WI-SW060
Form# 1327 Rev: 1			SHEET	1 OF 7