
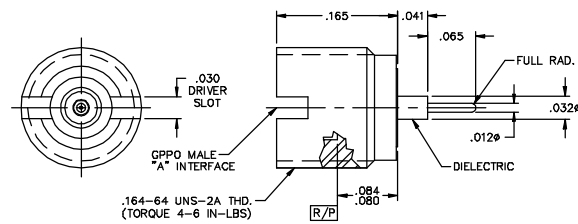


DATE REWSE: 12/2/00

PROTO NUMBER	"A" INTERFACE
B003-L33-02	FULL DETENT
B003-L35-02	SMOOTH BORE


MATERIAL AND FINISH

SHROUD AND BUSHING: CRES 303; PASSIVATED
 CENTER CONTACT: BeCu; GOLD PLATE 50-100 ? INCHES
 OVER NICKEL PLATE 50 ? INCHES MIN.
 DIELECTRIC: VIRGIN PTFE (TEFLON)



RECOMMENDED TOOLING:

-STARTING TAP
 B099-A99-01
 -BOTTOM TAP
 B099-A99-02
 -THREAD-IN DRIVERS
 B097-A SERIES

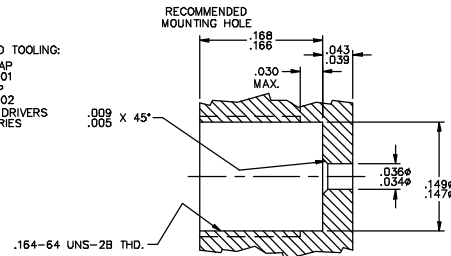

GPPO MALE THREAD-IN
 STRAIGHT TERMINAL
 (TAB DETENT)

IDENT CODE:
 B2316
 REVISION: A

GILBERT
 ENGINEERING

SOURCE FILE: SK-1805	DWG. NO.: OL-B003-L3X-02	ASSY. PROC.: -
----------------------	--------------------------	----------------