





| CATALOG NUMBER | "A" INTERFACE |
|----------------|---------------|
| R032-L43-14    | FULL DETENT   |
| R032-L45-14    | SMOOTH BORE   |

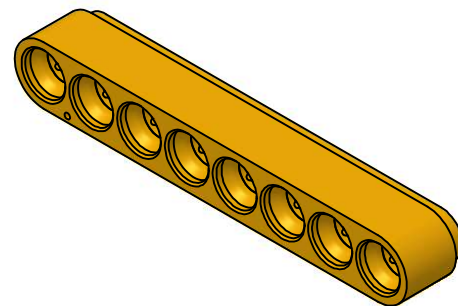

## MATERIAL AND FINISH

MOUNTING BLOCK AND CENTER PINS: IRON-NICKEL-COBALT SEALING ALLOY (KOVAR) PER ASTM F 15; GOLD PLATE

DIELECTRICS: CORNING 7070 GLASS OR EQUIVALENT

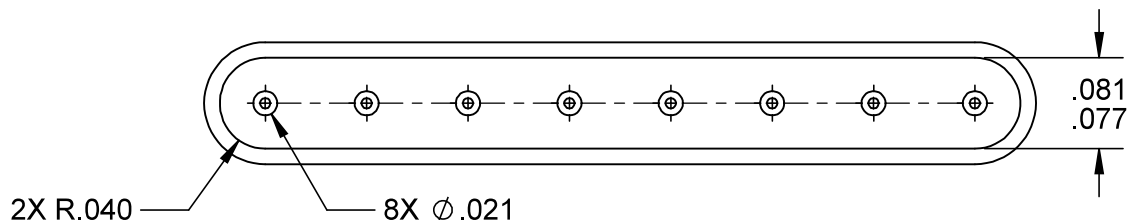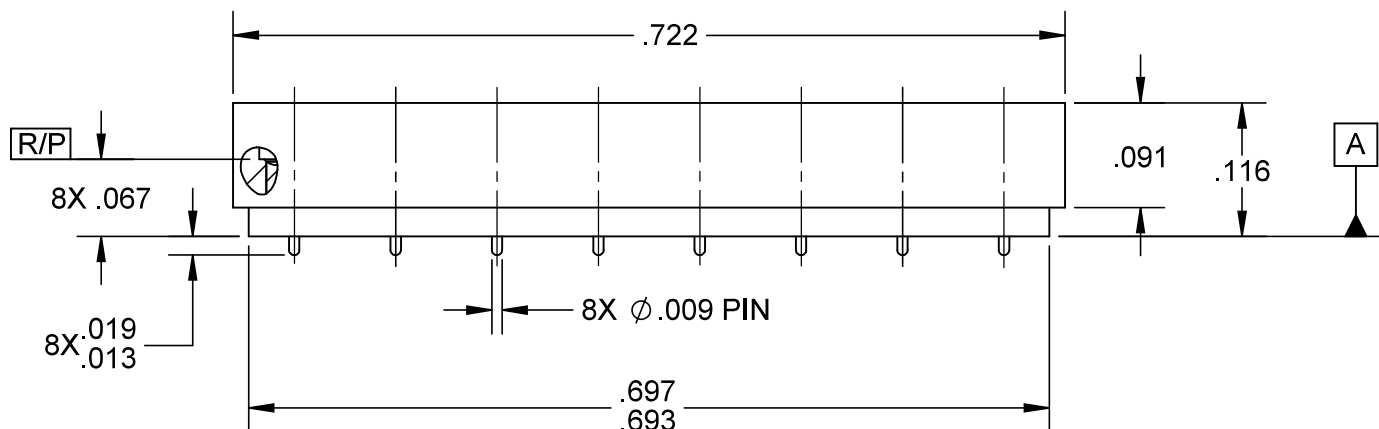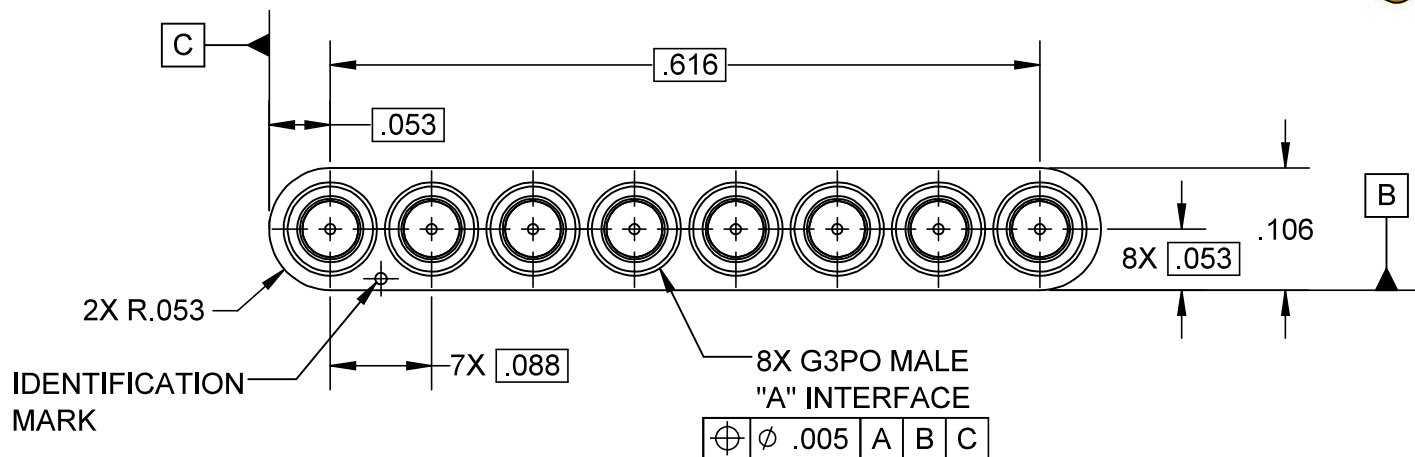

CORNING RESTRICTED - This drawing and any data contained herein is the proprietary and confidential information of Corning. Neither receipt nor possession of this drawing provides any right to duplicate, use, or disclose any information contained herein except with the express written consent of Corning.  
EXPORT CONTROL - This document contains information within the purview of the Export Administration Regulations (EAR), 15 CFR 730-774, and may be export controlled.

|                                  |               |      |          |
|----------------------------------|---------------|------|----------|
| APPROX. WEIGHT: 0.8492 grams     | SIGNATURES    | INIT | DATE:    |
| TOLERANCE:                       | DRAWN: CMH    |      | 6/2/2016 |
| .XX ±.010 .XXX ±.005 ANGULAR ±5° | CHECKED: BLK  |      |          |
|                                  | APPROVED: CRS |      |          |

**G3PO MALE 8 POSITION  
HERMETIC BLOCK (TAB  
DETENT)**

CAGE CODE:  
82316

SCALE:  
6:1

REVISION: A

**CORNING**

PLANT OF ORIGIN

CORNING PHOENIX  
PLANT: (623)245-1050  
CUSTOMER SERVICE:  
(800) 651-8869

SOURCE  
FILE: SK-5775

DWG. NO.:

OL-R032-L4X-14

ASSY.  
PROC.: -