
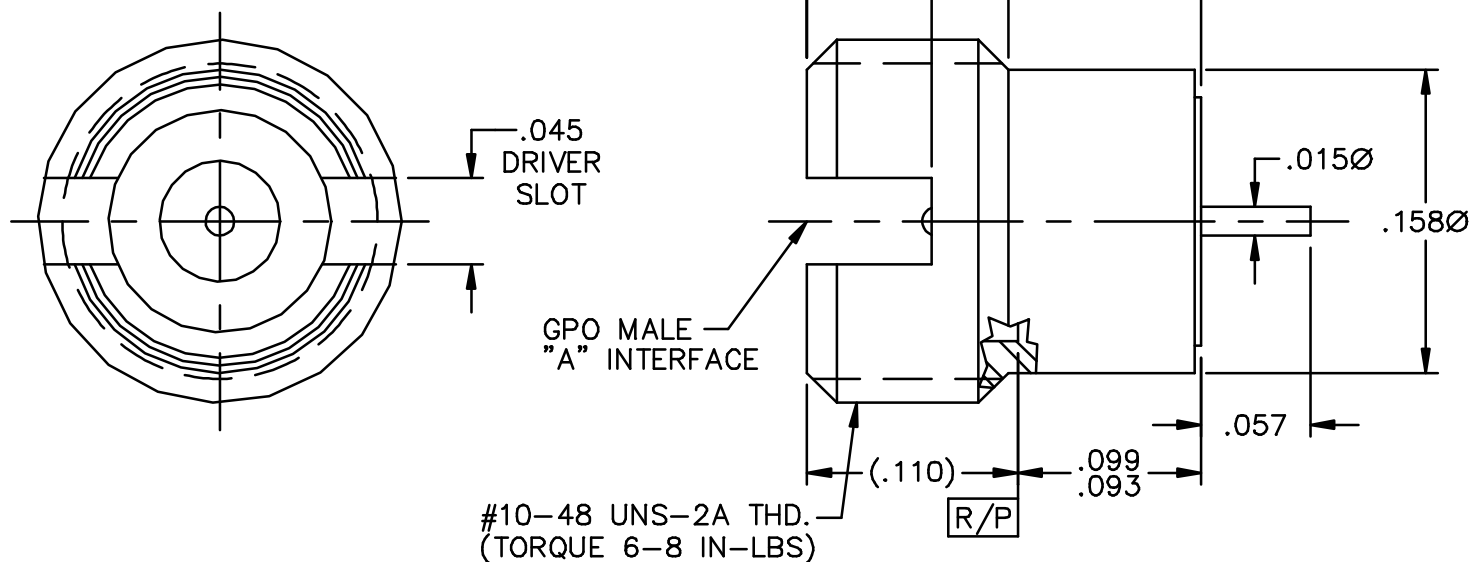


CATALOG NUMBER "A" INTERFACE

0119-258-3-FD	FULL DETENT
0119-258-3-LD	LIMITED DETENT
0119-258-3-SB	SMOOTH BORE

MATERIAL AND FINISH

SHROUD AND BUSHING: CRES 303; PASSIVATED
 OUTER RING AND IRON-NICKEL-COBALT SEALING ALLOY
 CENTER CONTACT: (KOVAR); GOLD PLATE
 DIELECTRIC: CORNING 7070 GLASS




RECOMMENDED MOUNTING HOLE

#10-48 UNS-2B THD.

RECOMMENDED TOOLING:

-STARTING TAP
 L091-A99-01
 -BOTTOM TAP
 L091-A99-02
 -THREAD-IN DRIVER
 A097-A99-01 FULL DETENT
 A097-A99-02 LIMITED DETENT
 A097-A99-03 SMOOTH BORE

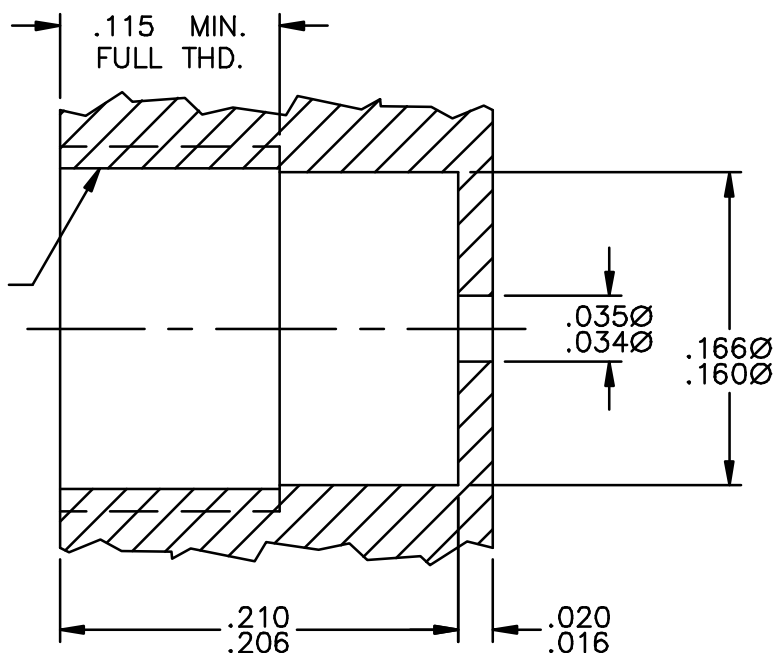

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO MALE THREAD-IN
 NON-HERMETIC STRAIGHT
 TERMINAL (TAB DETENT)

IDENT CODE:
 82316

REVISION: G

Corning Gilbert Inc.

SOURCE FILE: SK-1567

DWG. NO.: OL-0119-258-3-TAB

ASSY. PROC.: -