CATALOG NUMBER	"A" INTERFACE
A003–L33–01	FULL DETENT
A003–L34–01	LIMITED DETENT
A003–L35–01	SMOOTH BORE



MATERIAL AND FINISH

SHROUD AND BUSHING: CRES 303; PASSIVATED

CENTER CONTACT: BeCu; GOLD PLATE 75 MICROINCHES TYPICAL OVER NICKEL PLATE 100 MICROINCHES TYPICAL

DIELECTRICS: VIRGIN PTFE

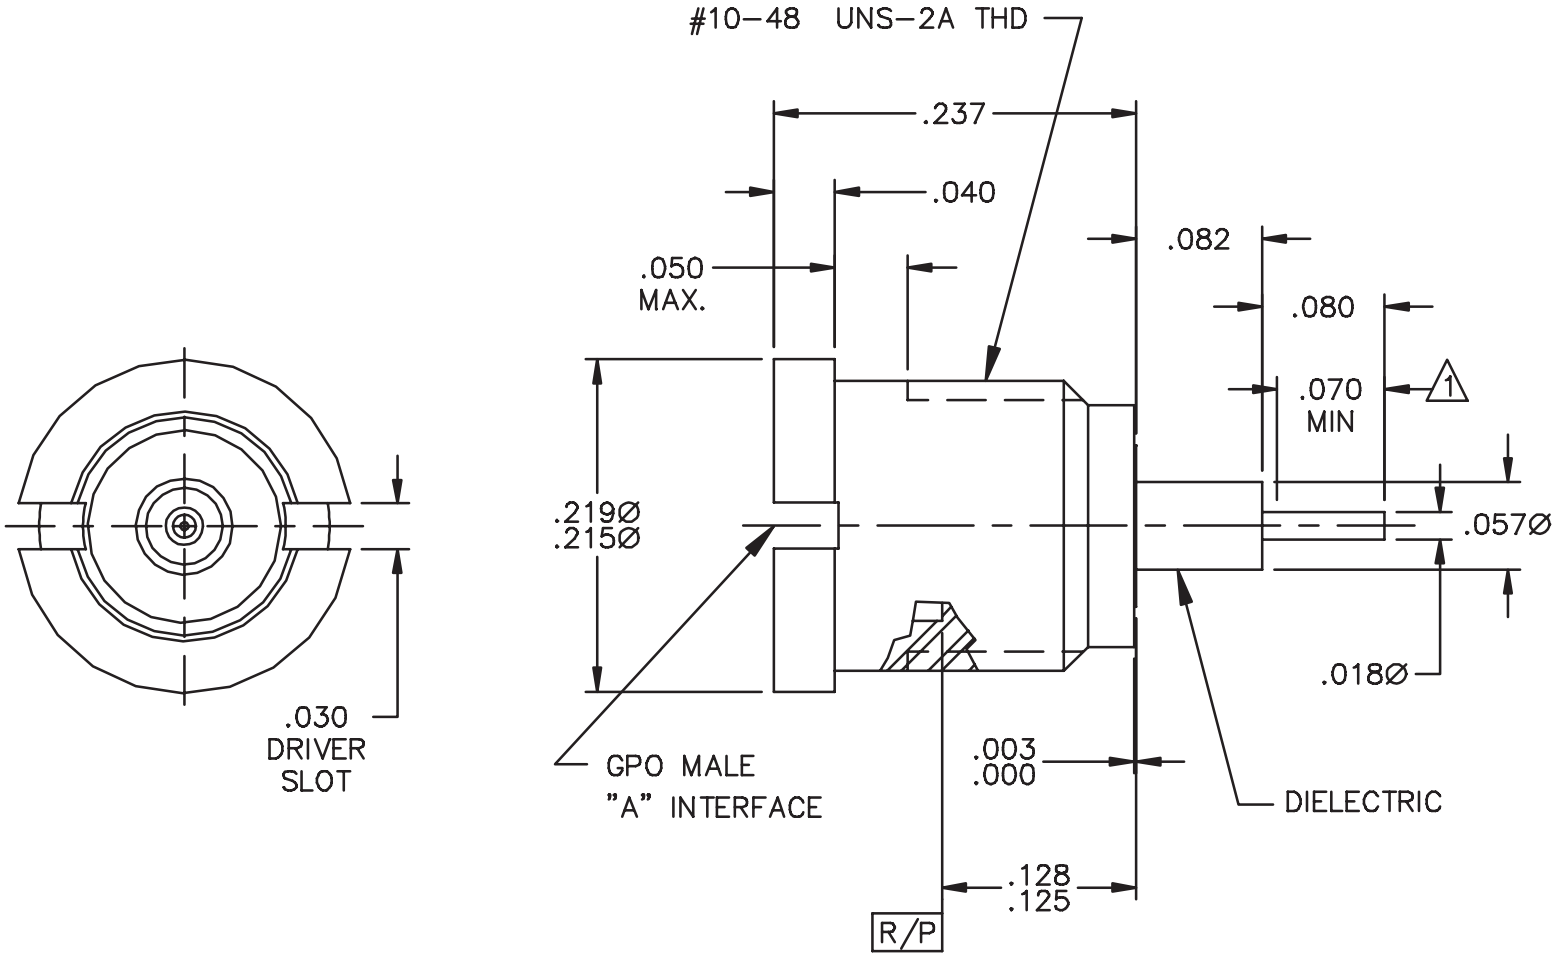

NOTES:

1. SOLDER DIP TO DIMENSION SHOWN (SN63).

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

GPO MALE THREAD–IN STRAIGHT TERMINAL (TAB DETENT)	IDENT CODE: 82316 REVISION: C	Corning Gilbert Inc.

SOURCE FILE:	MECR# 3050	DWG. NO.:	OL–A003–L3X–01	ASSY. PROC.:	–