
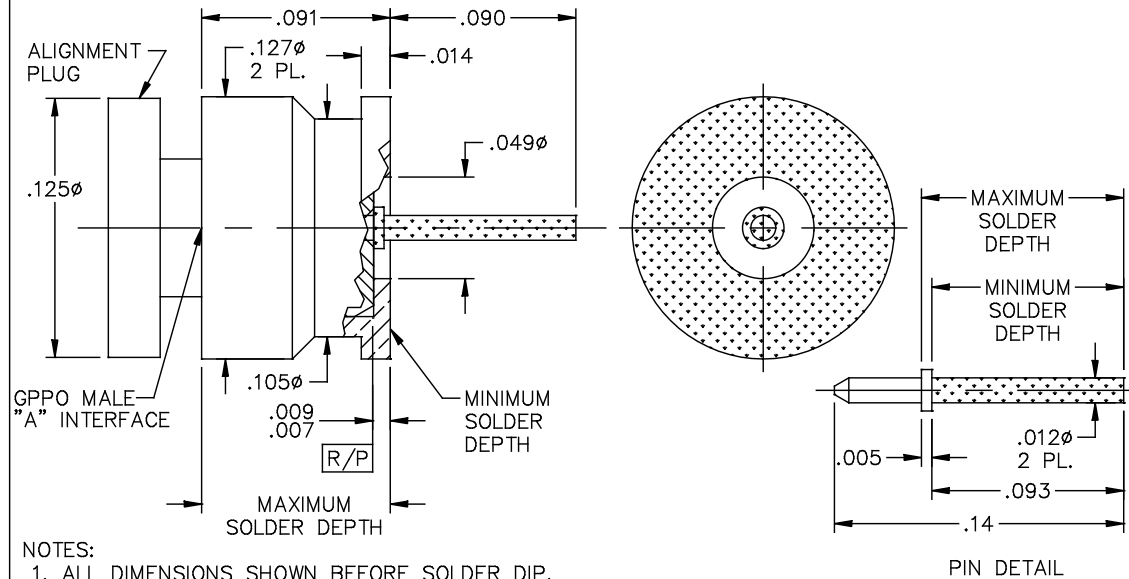



CATALOG NUMBER	"A" INTERFACE
B012-L13-09-T	FULL DETENT
B012-L15-09-T	SMOOTH BORE

MATERIAL AND FINISH

CENTER CONTACT AND SHROUD: BeCu; GOLD PLATE 75 MICROINCHES TYPICAL
OVER NICKEL PLATE 100 MICROINCHES TYPICAL
ALIGNMENT PLUG: VIRGIN PTFE
SOLDER: SN63 SOLDER



RECOMMENDED MOUNTING PATTERN

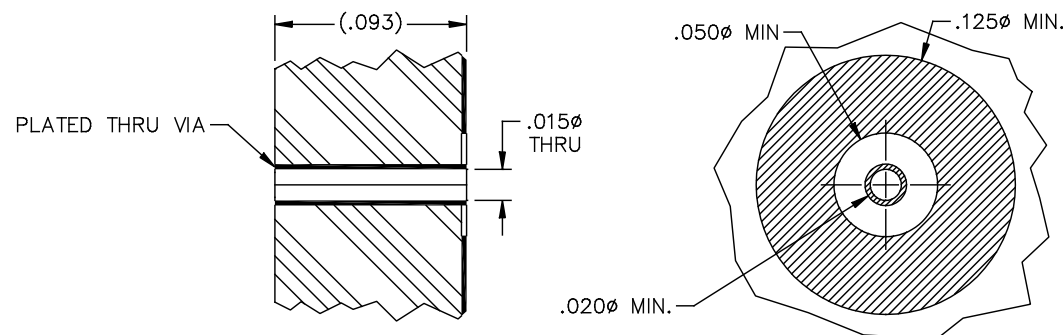

This drawing and any data contained herein is the property of Corning Gilbert Inc., and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Corning Gilbert Inc.

SOLDER DIPPED GPPO MALE
(TAB DETENT) PCB SURFACE
MOUNT WITH PIN AND PLUG

IDENT CODE:
82316
REVISION: B

Corning Gilbert Inc.

SOURCE FILE: MECR# 3151

DWG. NO.: OL-B012-L1X-09-T

ASSY. PROC.: —