
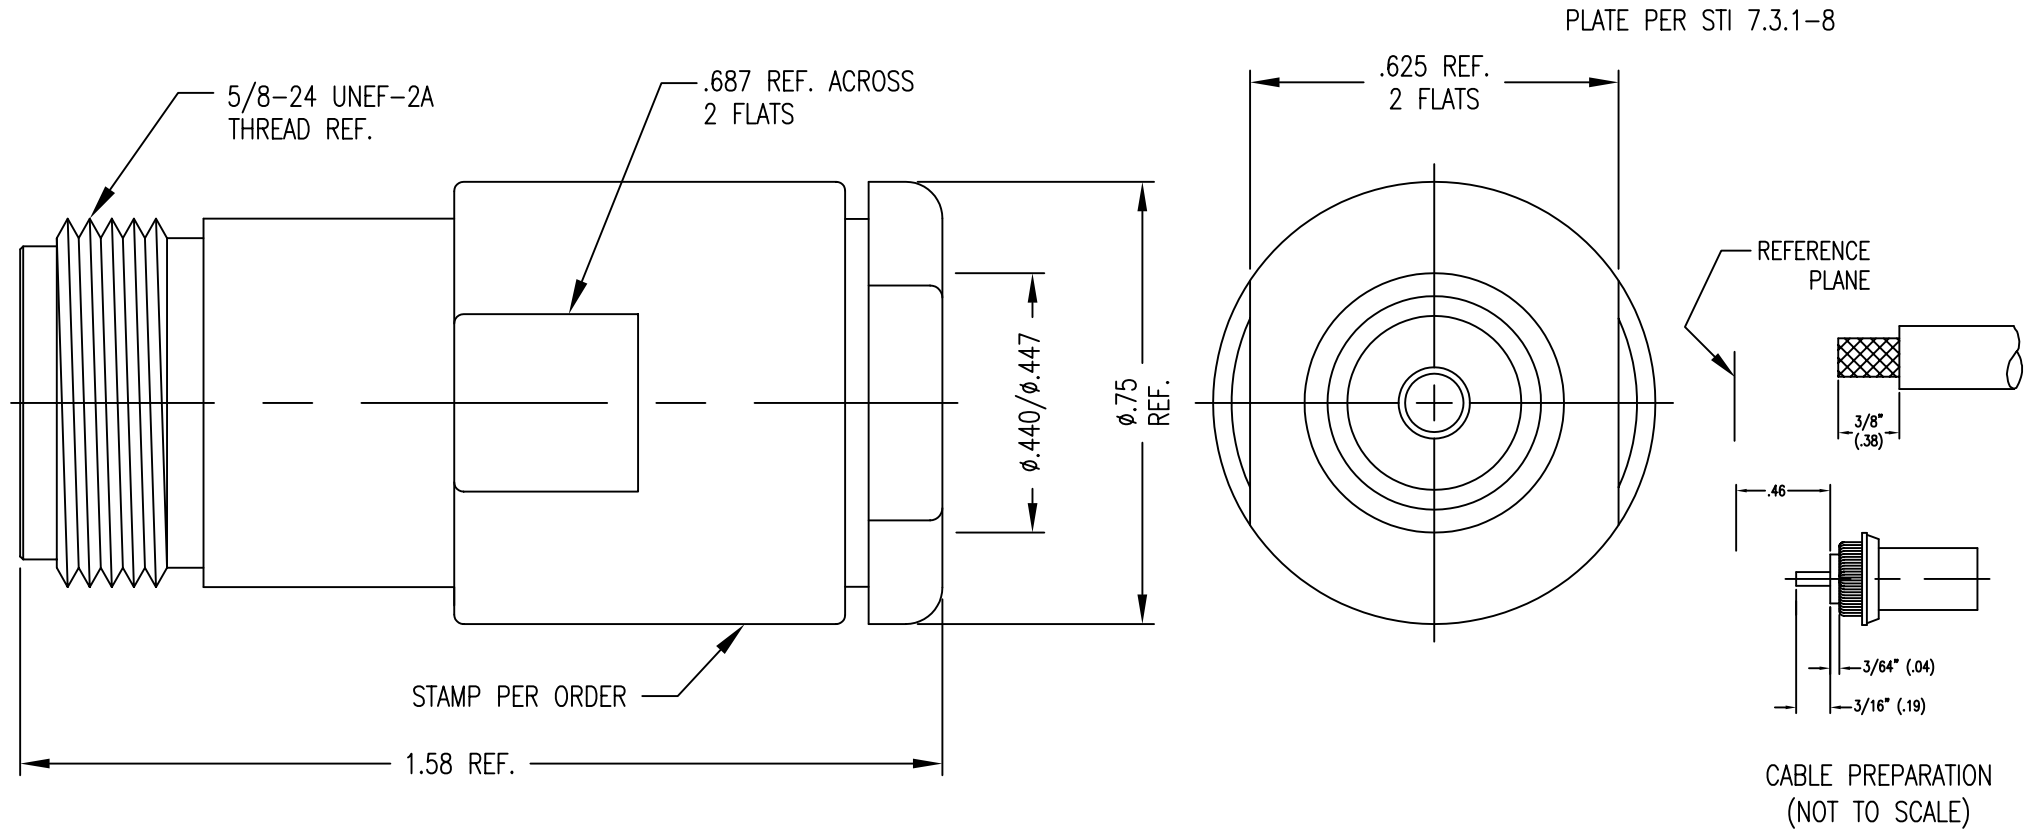


1.0 PERFORMANCE
1.1 FREQUENCY RANGE: DC-11GHz
1.2 VOLTAGE RATING: 1000V RMS (sea level)
1.3 NOMINAL IMPEDANCE: 50 OHMS
1.4 DWV: 2500 V RMS @ 60 Hz (sea level)
1.5 TEMPERATURE RANGE: -65°C TO +165°C
2.0 MATERIALS:

2.1 DIELECTRICS: PTFE, ASTM-B-1710
2.2 CONTACT: BERYLLIUM COPPER ASTM-B-196
2.3 ALL OTHER METAL PARTS: BRASS, ASTM-B-16
2.4 GASKET: SILICONE RUBBER, ZZ-R-765, GR. 50, RED
3.0 FINISHES: SEE TABLE
4.0 MECHANICAL:
4.1 INTERFACES IN ACCORDANCE WITH MIL-STD-348

DWG NO. OL-23D-1		REV. A
PART NUMBER	BODY	CONTACT
UG-23D/U	NICKEL	SILVER
UG-23D/U NI/GOLD	NICKEL	GOLD
UG-23D/U SI	SILVER	SILVER
UG-23D/U SI/GOLD	SILVER	GOLD



					PROPRIETARY THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN*TRON INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN*TRON INCORPORATED.				 SAN • TRON, INC. 4 NEWBURYPORT TPK, IPSWICH, MA 01938				
					REMOVE ALL BURRS AND SHARP EDGES .005 MAX. UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN INCHES AND APPLY AFTER PLATING				TITLE TYPE N JACK, STRAIGHT, CLAMP RG-8,9/U (CABLE GROUPS 4,4A)				
A	ORIGINAL RELEASE		10/24/07	DVP	DVP					MATERIAL:		FINISH: SEE TABLE	
Rev.	Revisions		Date	Dwn.	Appd.	UNSPECIFIED TOL. DEC. ± .005 FRAC. ± 1/64 ANG. ± 1/2"		DWN CHKD APPR	DVP SJS FSH	8/18/83 10/24/07 /			
RECOM. STOCK SIZE		FT/M PCS	QTY REQD			CONCENTRICITY .004 TIR ALL MACHINED SURFACES				FSCM NO. 50896		DWG NO.	REV.
						63/✓				SCALE NOT SCALED		OL-23D-1	A