



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		REV PER ECO 20-012150	9-15-20	CT FB

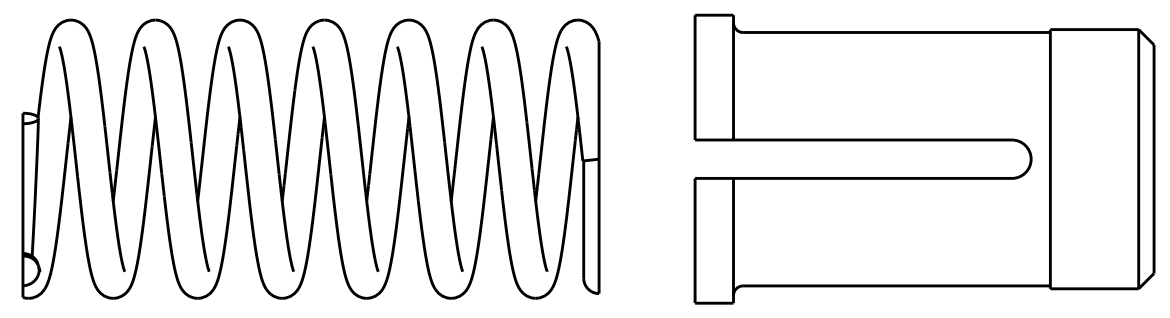

SPRING AND ADAPTOR KIT FOR .086 CABLE ⁵

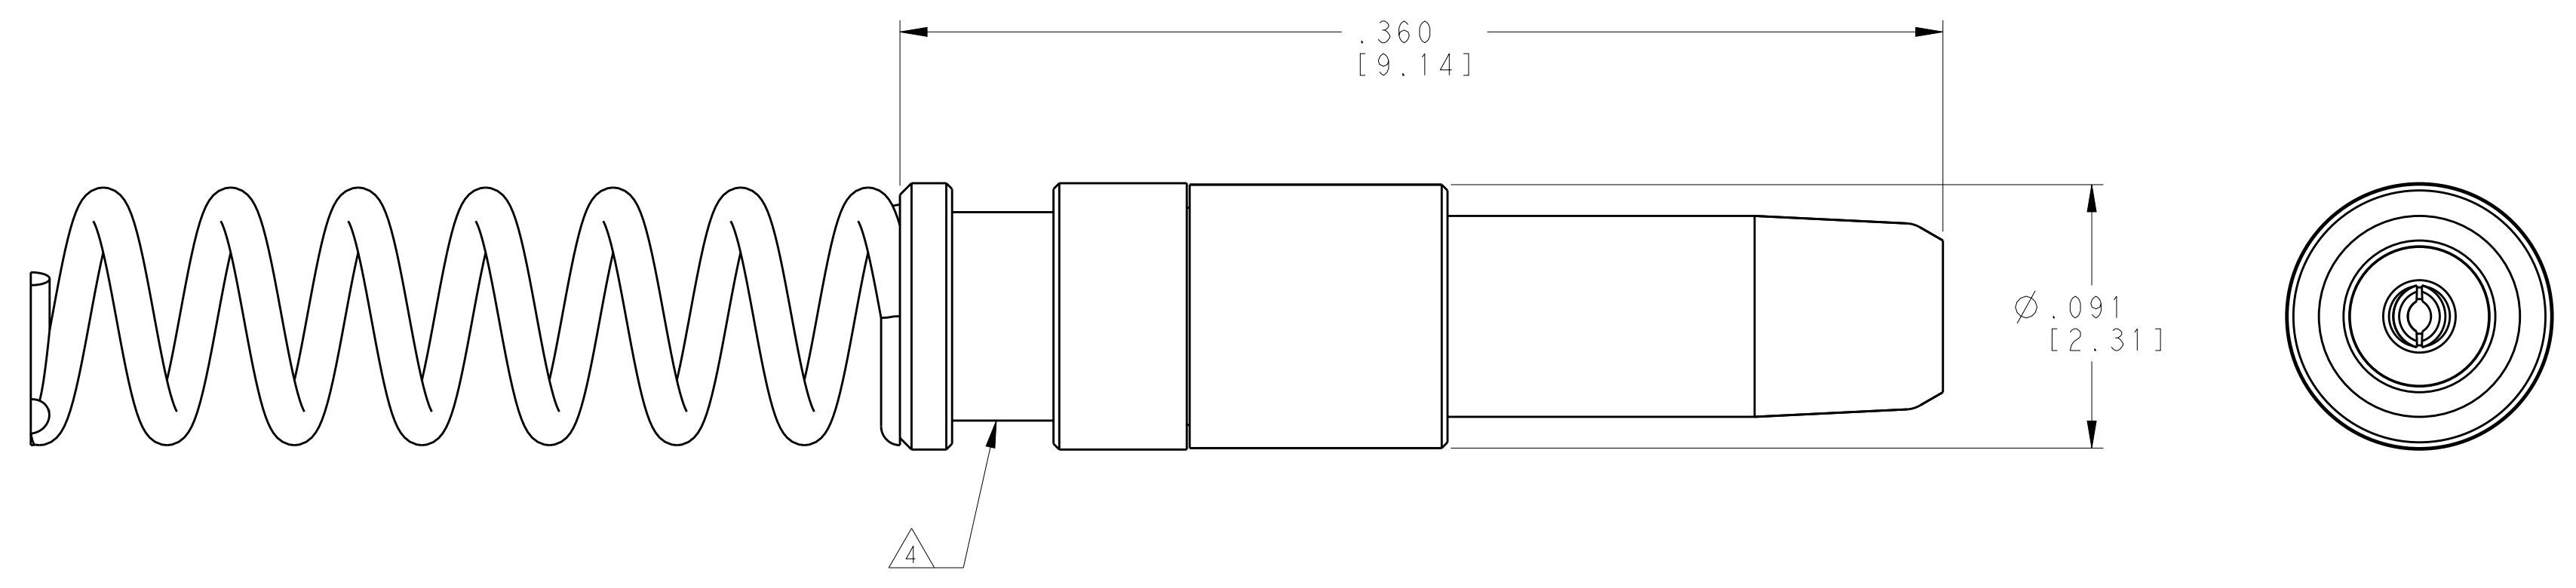

- ¹ MATERIAL:
 BODY AND CENTER CONTACT: COPPER ALLOY
 INSULATOR: TEFLON (PTFE)
 SPRING: STAINLESS STEEL
- ² FINISH: FRONT BODY AND CENTER CONTACT: 50-90 μIN GOLD PLATE OVER NICKEL
 REAR BODY: 3-15 μIN GOLD PLATE OVER NICKEL
- 3. SPRING IS SHIPPED LOOSE FROM CONTACT ASSEMBLY
- ⁴ RETENTION GROOVE REQUIRED FOR .086 ADAPTER KIT.
- ⁵ CONTAINS 2302345-2 AND ADAPTER KIT 2373609-1.
- 6. DEPENDING ON DATE OF MANUFACTURE, THE RETENTION GROOVE MAY OR MAY NOT BE FOUND ON INVENTORY ON 2302345-1.

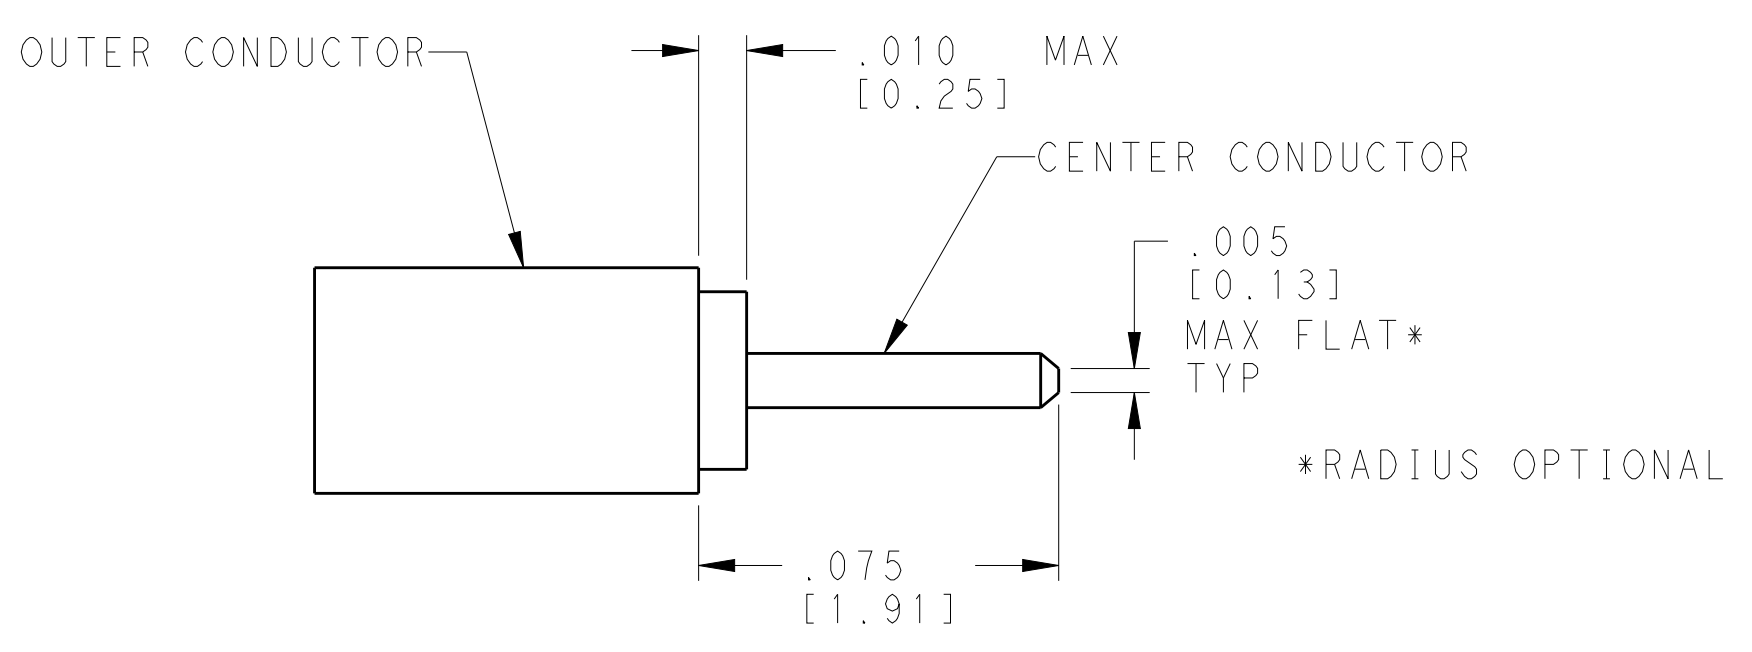

SCALE 25:1
 CABLE PREPARATION FOR
 Ø.047 SEMI-RIGID CABLES

⁵	2302345-3
⁴	2302345-2
--	2302345-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER 31MAY2016	STE TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK D. WILSON 31MAY2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. WILSON 11APR2018	NAME NanoRF PIN CONTACT ASSEMBLY	
0 PLC ±	1 PLC ±	PRODUCT SPEC 108-163006	SIZE A2	CAGE CODE 00779
2 PLC ±	3 PLC ±.005[0.13]	APPLICATION SPEC 408-163016	DRAWING NO C-2302345	RESTRICTED TO -
4 PLC ±	ANGLES ±	WEIGHT -	SCALE 20:1 SHEET 1 OF 1 REV B	
FINISH		CUSTOMER DRAWING		