


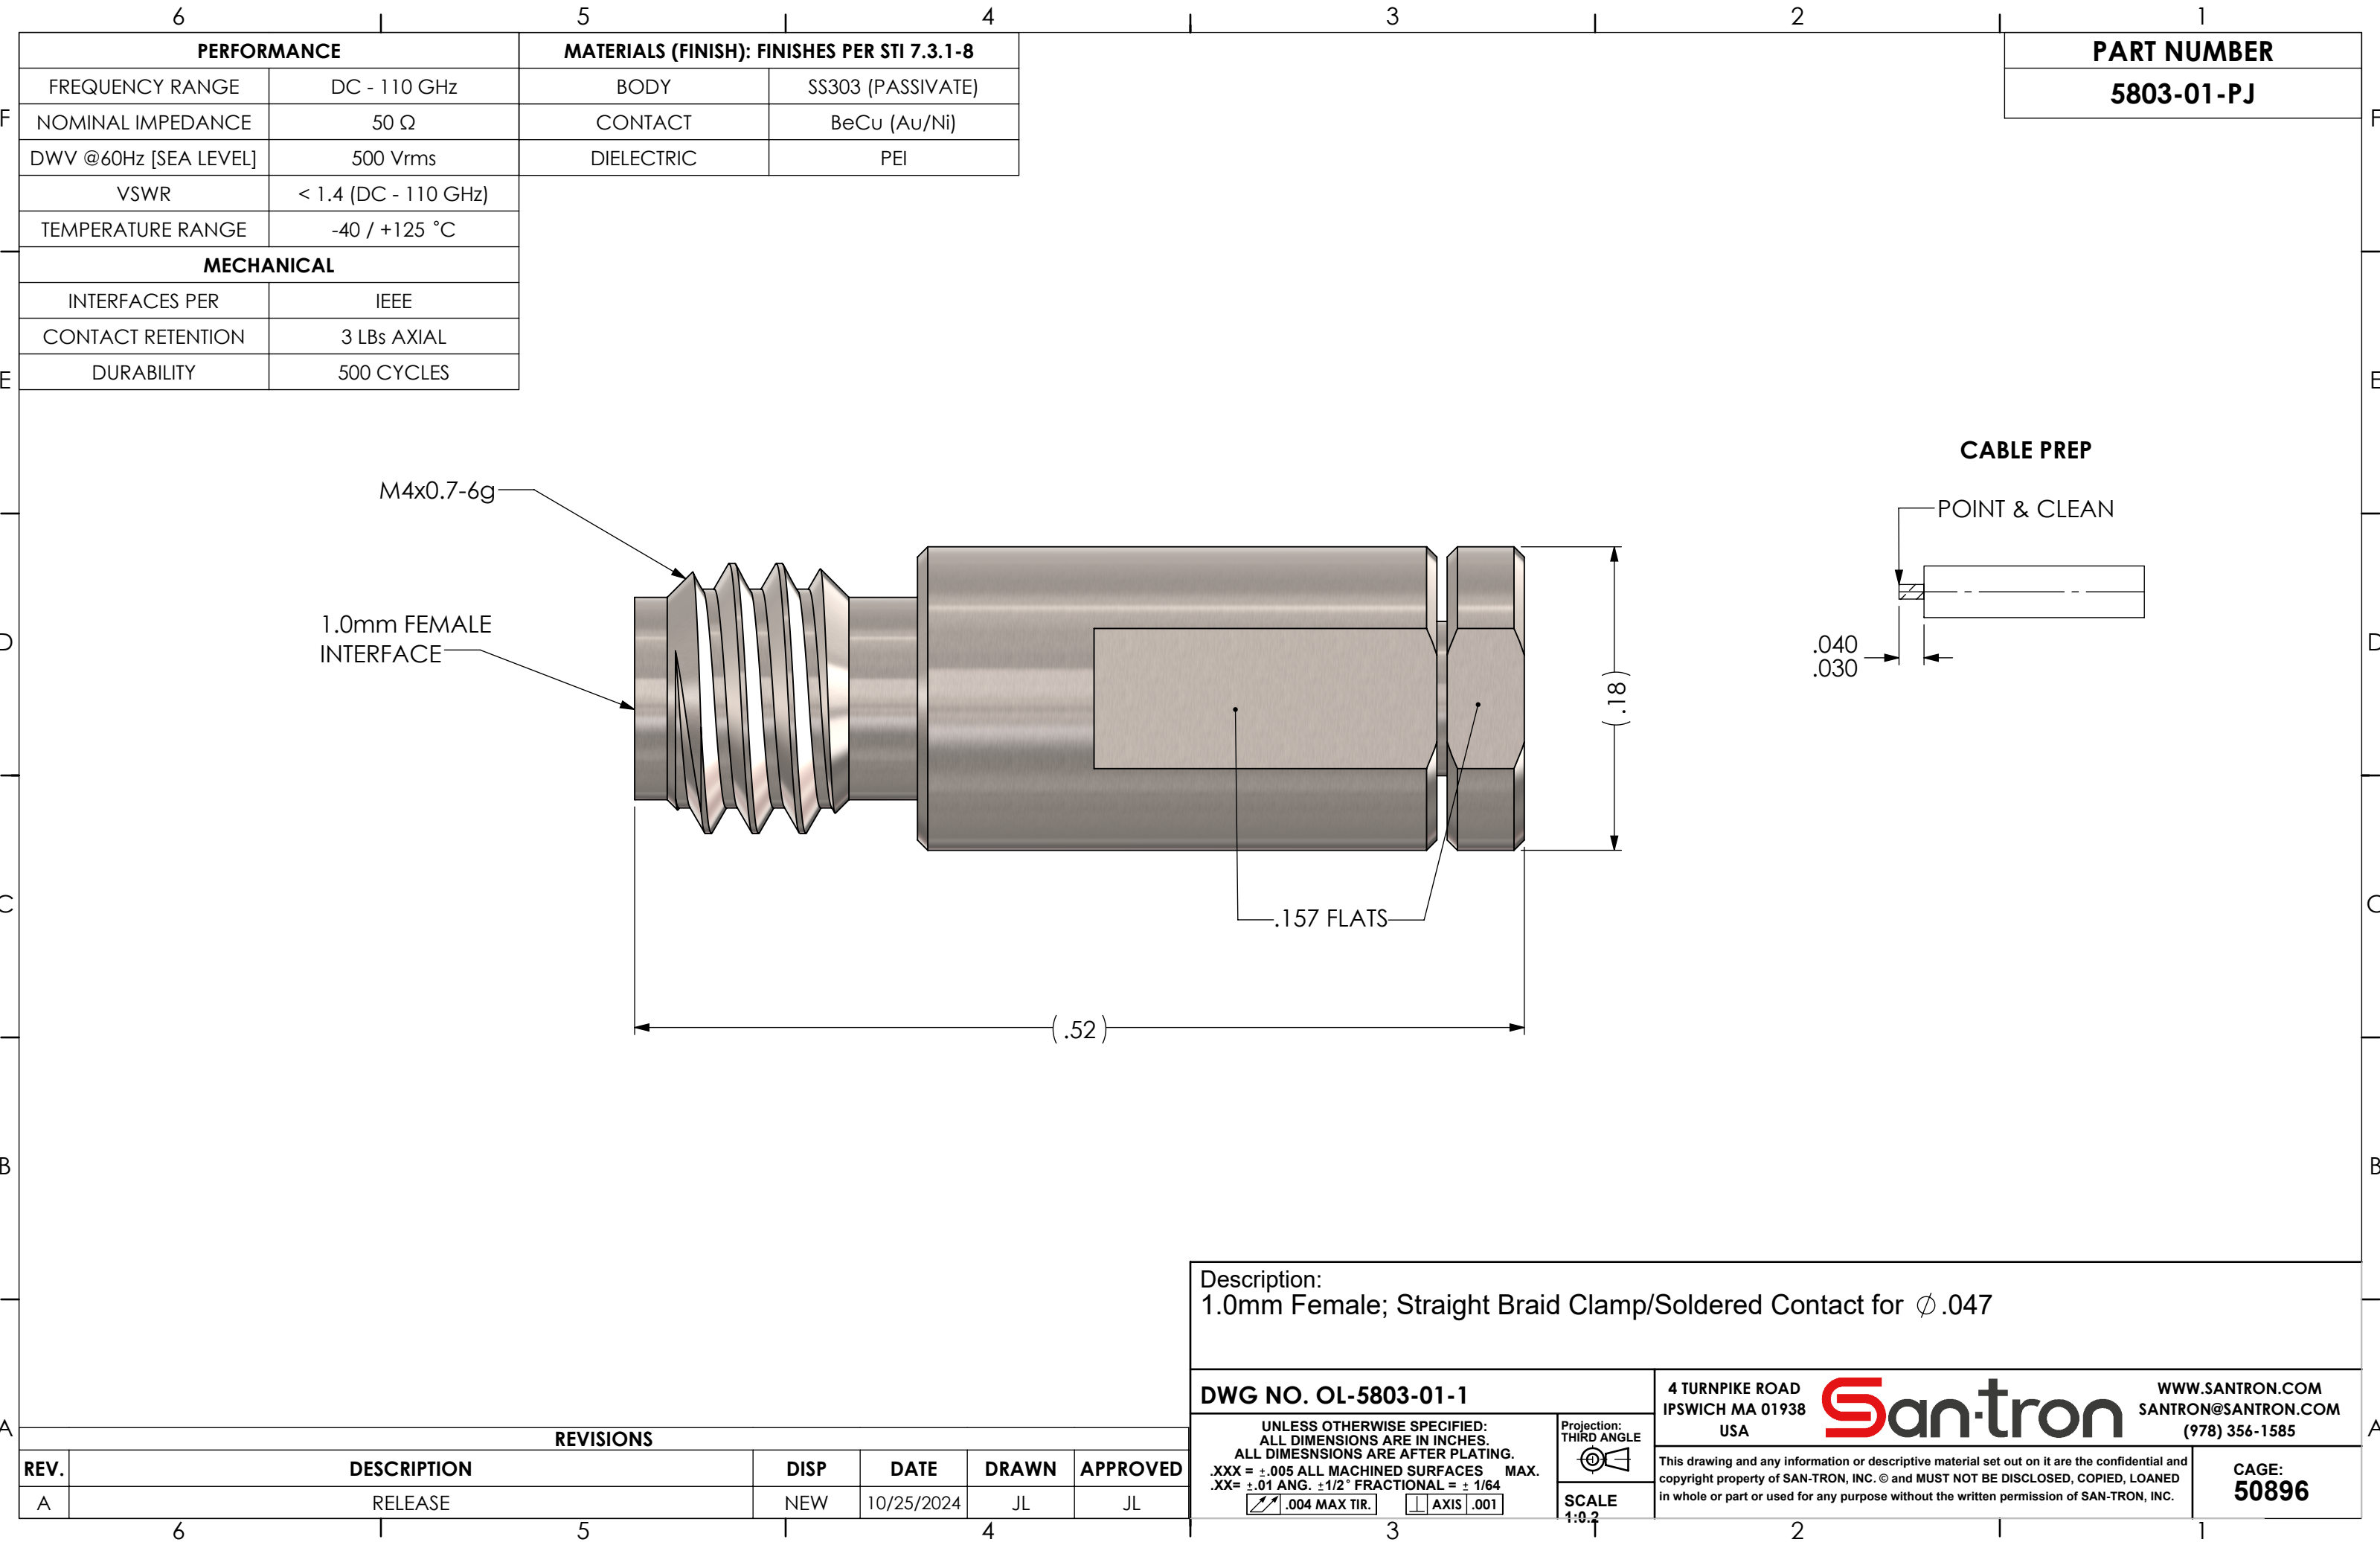

PERFORMANCE	
FREQUENCY RANGE	DC - 110 GHz
NOMINAL IMPEDANCE	50 Ω
DWV @60Hz [SEA LEVEL]	500 Vrms
VSWR	< 1.4 (DC - 110 GHz)
TEMPERATURE RANGE	-40 / +125 °C
MECHANICAL	
INTERFACES PER	IEEE
CONTACT RETENTION	3 LBs AXIAL
DURABILITY	500 CYCLES

MATERIALS (FINISH): FINISHES PER STI 7.3.1-8	
BODY	SS303 (PASSIVATE)
CONTACT	BeCu (Au/Ni)
DIELECTRIC	PEI

PART NUMBER
5803-01-PJ

Description:
1.0mm Female; Straight Braid Clamp/Soldered Contact for $\varnothing$.047

DWG NO. OL-5803-01-1

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.
.XXX = ±.005 ALL MACHINED SURFACES MAX.
.XX= ±.01 ANG. ±1/2° FRACTIONAL = ± 1/64

.004 MAX TIR.

AXIS .001

Projection:
THIRD ANGLE

SCALE
1:0.2

4 TURNPIKE ROAD
IPSWICH MA 01938
USA

WWW.SANTRON.COM
SANTRON@SANTRON.COM
(978) 356-1585

This drawing and any information or descriptive material set out on it are the confidential and copyright property of SAN-TRON, INC. © and MUST NOT BE DISCLOSED, COPIED, LOANED in whole or part or used for any purpose without the written permission of SAN-TRON, INC.

CAGE:
50896

REVISIONS					
REV.	DESCRIPTION	DISP	DATE	DRAWN	APPROVED
A	RELEASE	NEW	10/25/2024	JL	JL