


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 55143	08/24	SEE PDM

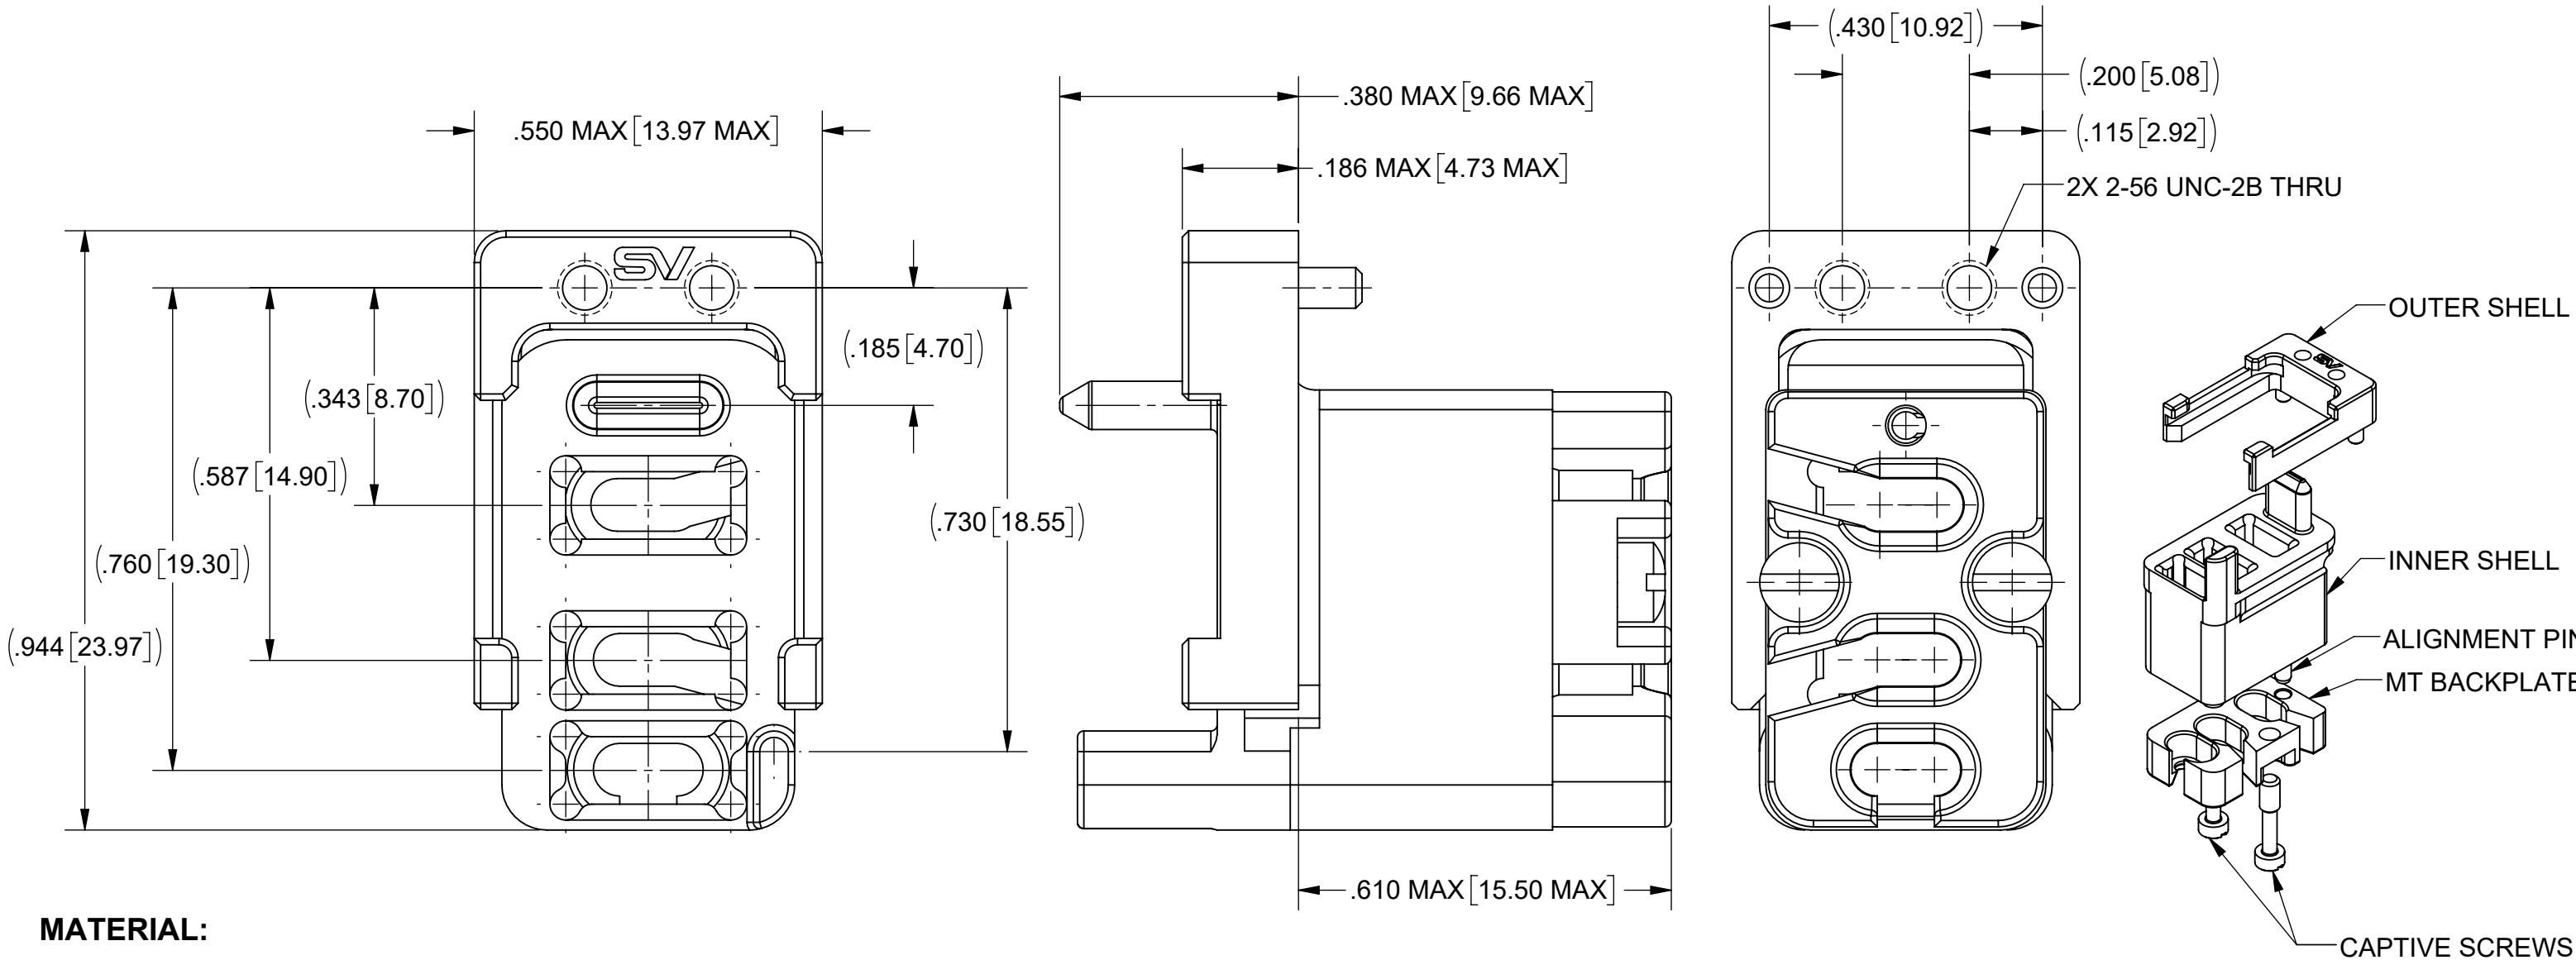

MATERIAL:

OUTER SHELL,
INNER SHELL,
& MT BACKPLATE: ALUMINUM PER ASTM B211 ALLOY 6061-T6
OR AMS-QQ-A-200/8 ALLOY 6061-T6

CAPTIVE SCREWS
& ALIGNMENT PIN: STAINLESS STEEL


FINISH:

OUTER SHELL,
INNER SHELL,
& MT BACKPLATE: CHEMICAL CONVERSION COATING PER MIL-DTL-5541,
CLASS 3 COLOR CLEAR, TYPE II

CAPTIVE SCREWS,
& ALIGNMENT PIN: PASSIVATED

NOTES:

- 1. COMPLIANT TO VITA 66.5, VITA 65 SECTION 6.4.5.7.6, AND ALIGNED TO THE SOSA TECHNICAL STANDARD.
- 2. DESIGNED TO CARRY (3) 12 OR 24 FIBER MT FERRULES.
- 3. LICENSED EQUIVALENT TO TE P/N 2388438-1 AND CAN BE USED AS A DROP-IN REPLACEMENT.
- 4. SHIPPED WITHOUT MT FERRULE KIT.
- 5. MATES TO SV P/N 9301-60048.
- 6. PCB LAYOUT ON SHEET 2.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com		
FINISH:	SEE NOTES	FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$ X°X' $\pm 15'$	1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS				
SURFACE AREA:	N/A	DECIMAL: .X $\pm .030$.XX $\pm .010$.XXX $\pm .005$	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994		TITLE: 3 PORT FIBER OPTIC MT BAKPLANE MODULE VITA 66.5		
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION		DRAWN: SJ 08/30/24		SIZE DWG. NO.	
				CHECKED: SEE PDM		9301-80009	
				APPROVED: SEE PDM			
				SCALE: 4:1		SHEET 1 OF 2	

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
	SEE SHEET 1		SEE PDM

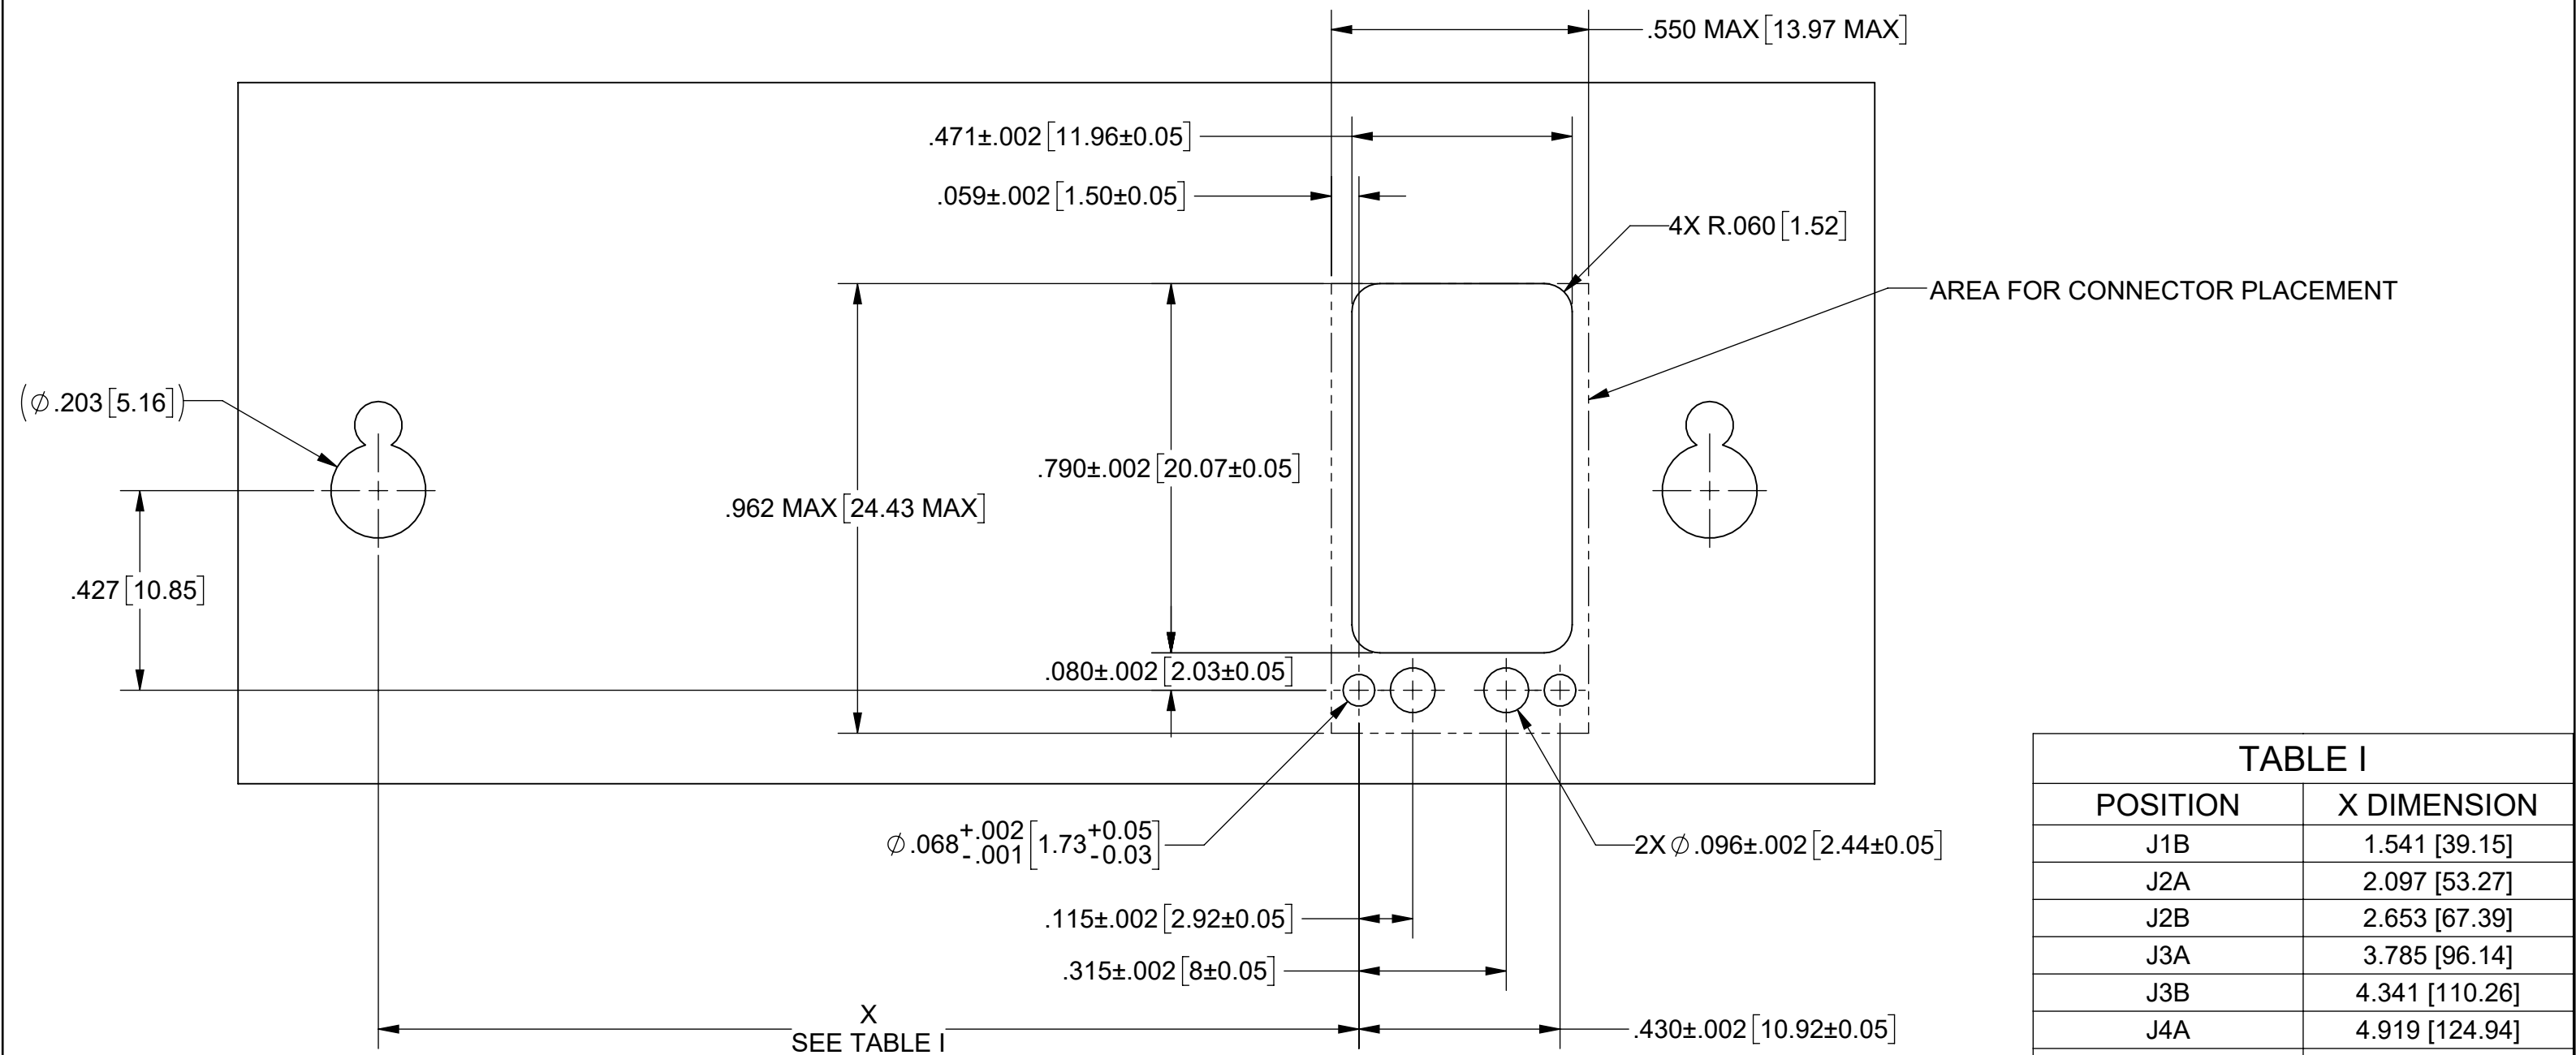


TABLE I	
POSITION	X DIMENSION
J1B	1.541 [39.15]
J2A	2.097 [53.27]
J2B	2.653 [67.39]
J3A	3.785 [96.14]
J3B	4.341 [110.26]
J4A	4.919 [124.94]
J4B	5.475 [139.06]
J5A	6.053 [153.74]
J5B	6.609 [167.86]
J6A	7.187 [182.54]
J6B	7.743 [196.66]

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--