


SEARAY™ PRODUCT SOLUTIONS



SEAM

Open-Pin-Field Terminal
56 Gbps PAM4 performance;
stack heights from 7 to 18.5 mm



SEAM-RA

Right-Angle Terminal
25 Gbps performance;
guide post option




SEAF

Open-Pin-Field Socket
56 Gbps PAM4 performance;
stack heights from 7 to 18.5 mm




SEAF-RA

Right-Angle Socket
25 Gbps performance;
latching post option




SEAMP

Press-Fit Terminal
28 Gbps performance;
guide post option




SEAFP

Press-Fit Socket
Stack heights up to 16 mm

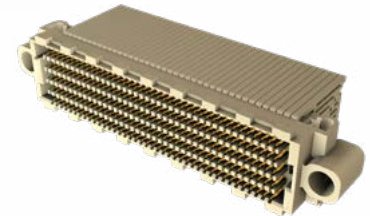


SEAFP-RA

Right-Angle Press-Fit Socket
Guide post option



SEAMI

85 Ω Tuned Terminal
14 Gbps performance;
stack heights up to 17.5 mm



SEAR

Elevated Riser
14 Gbps performance;
elevated stack heights
up to 40 mm



SEAC

High-Speed Cable Assembly
14 Gbps performance;
50 Ω coax or 100 Ω twinax cable
with up to 250 I/Os



JSO

Precision Board Stacking
Jack Screw Standoffs
Assists unmating and reduces risk for
component damage on boards