

REV.	DESCRIPTION	DATE	BY
B	SEE ECO GM-10790	11/24/99	JRM

MATERIAL AND FINISH

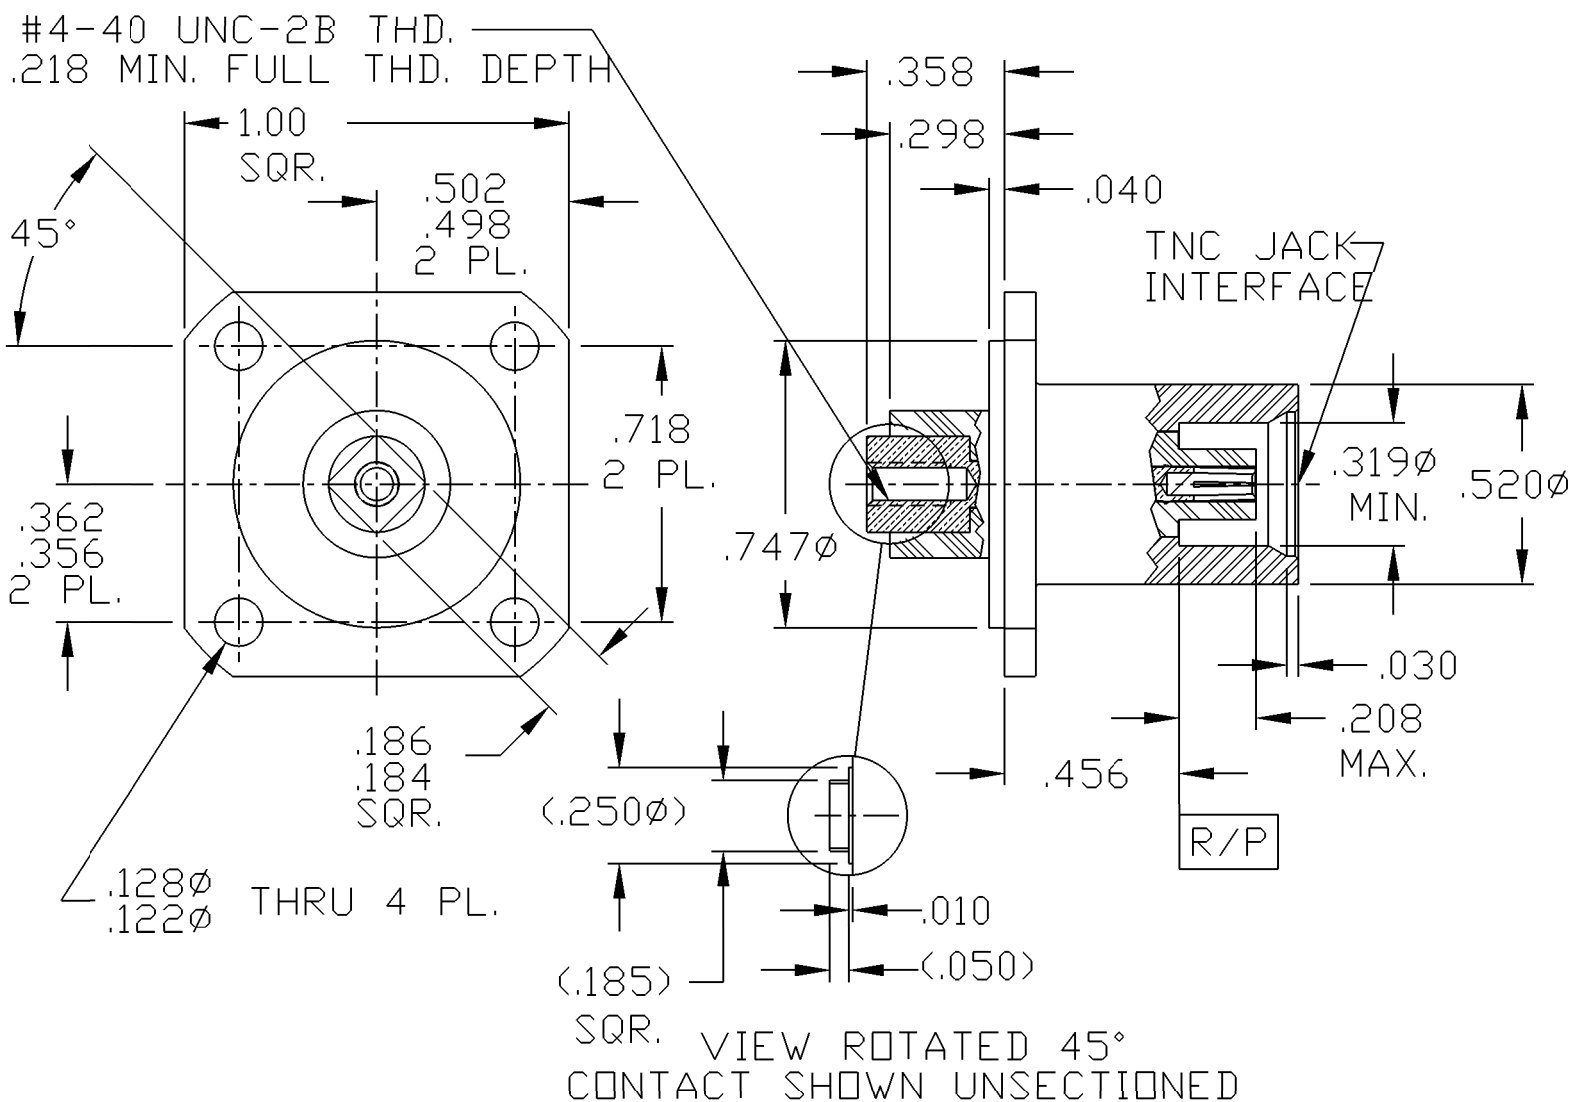
JACK HOUSING:

CRES 303 PER ASTM A 484
AND ASTM A 582 OR ASTM A 555
AND ASTM A 581. GOLD PLATE PER
MIL-G-45204

SOCKET CONTACT:

BERYLLIUM COPPER PER ASTM
B 196 AND/OR ASTM B 197.
GOLD PLATE PER MIL-G-45204;
TYPE I, GRADE C, CLASS 1.
OVER NICKEL PER QQ-N-290A;
CLASS 1; 50 MICRONS MIN.

DIELECTRIC:

VIRGIN PTFE FLUOROCARBON PER
ASTM D 1710 AND ASTM D 1457.

This drawing and any data contained therein is the property of Gilbert Engineering Co. and constitutes and contains proprietary and confidential information. Neither receipt nor possession of this drawing confers or transfers any right to duplicate, use or disclose any information contained herein except as expressly authorized by Gilbert Engineering Co. Inc.		ALL DIMENSIONS IN INCHES	CAT. NO. 0412-012-1	CODE IDENT NO. 82316
GILBERT ENGINEERING CO., INC.				
DRAWN: T. LEHMAN	DATE 9/1/95	TITLE OUTLINE DRAWING FOR TNC 4 HOLE FLANGE SKIN-MOUNT; SQUARE TERMINAL (NON ARC-SUPPRESSION) H01		
ASSEMBLY PROCEDURES: NONE		DWG. NO. OL-0412-012-1	REV B	
SOURCE FILE: SK-0907	SHT. 1 OF 1	Date: 2/21/2017 08:47AM	Component: OL04120121.DWG, Version: 3	