



TNC8105WP-0316

TNC Jack Crimp For Bulkhead

50Ω

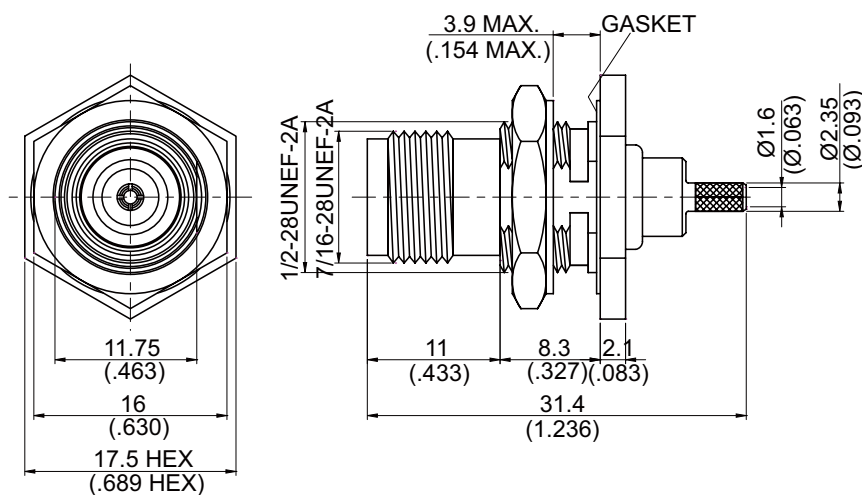

MOUNTING HOLE



NOTE: IP67 compliant (waterproof) when mated.

| Parts       | Material        | Plating (Micro-inch)                                  |
|-------------|-----------------|-------------------------------------------------------|
| Gasket      | Silicon         |                                                       |
| Ferrule     | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Small Pin   | Brass           | Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20 |
| Hex Nut     | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Washer      | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Barrel      | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |
| Insulator   | Teflon          |                                                       |
| Contact Pin | Phosphor Bronze | Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20 |
| Body        | Brass           | Tin-Zinc-Copper-Alloy 100 Over Copper 50              |

Weight:

Suitable Cables: RG174, RG188, RG316, RG316-E, RG316-FEP




This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

## CABLE ASSEMBLY INSTRUCTION

TNC8105WP-0316

JYE BAO CO., LTD.



| DIAGRAM | ASSEMBLY INSTRUCTION                                                                                             |
|---------|------------------------------------------------------------------------------------------------------------------|
|         | <p>Step 1: STRIP AS SHOWN.</p>                                                                                   |
|         | <p>Step 2: SLIDE FERRULE " C " OVER CABLE.<br/>Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND CRIMP IN " Y ".</p> |
|         | <p>Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.</p>                                               |
|         | <p>Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP.</p>                                        |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.