




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/06/10	A.D.M.

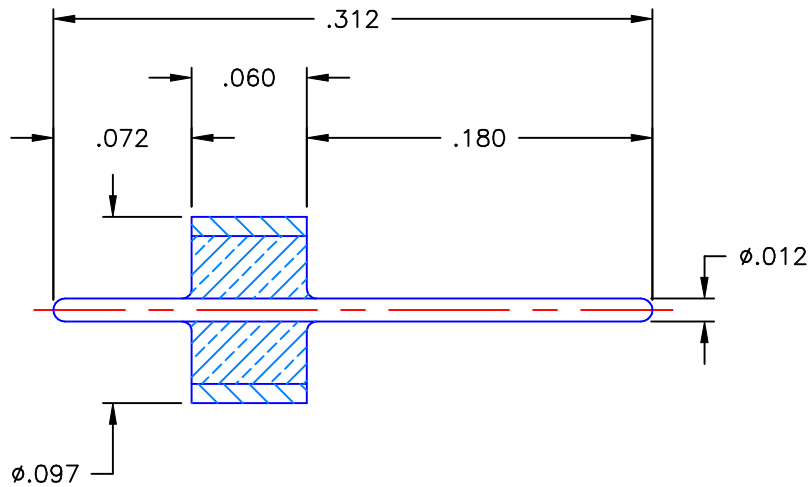

NOTES:

- MATERIALS:
 OUTER RING AND PIN = KOVAR
 GLASS BEAD = CORNING 7052
- FINISH:
 OUTER RING AND PIN = GOLD PLATE PER MIL-G-45204, TYPE II, GRADE C, CLASS I,
 OVER NICKEL PER MIL-C-26074, CLASS I, OVER COPPER PER MIL-C-14550.
- ASSEMBLY TO HAVE LEAK RATE LESS THAN 1×10^{-8} cc/sec.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE: 12/06/10	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.
DECIMAL	ANGLE	CHKD: D.N.	DATE: 12/06/10	
		APVD: J.M.	DATE: 12/06/10	
REFERENCE:		MATERIALS & FINISHES: SEE NOTES		GLASS SEAL ASSEMBLY 50 OHM CONTROL DRAWING
ORIGINATOR: A.D.M. DATE: 12/06/10		SIZE: A	FSCM NO.: 19505	DWG NO.: 920-55
		SCALE: 10:1	THIRD ANGLE PROJECTION	REV: A
				SHEET 1 OF 1

920-55