


Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.036" +/- 0.001
2 – Dielectric	Microporous PTFE Tape	0.106" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.118" (nominal)
4 – Interlayer	Helically Wrap Metalized Film	0.127" (nominal)
5 – Shield	Silver Plated Copper Round Braid	0.143" (nominal)
6 – Jacket	Extruded FEP	0.160" +/- 0.008
	Extruded Polyurethane	0.190" +/- 0.008

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	76% Nominal
Delay	1.34 ns/ft
Capacitance	26.8 pF
Maximum Frequency	40Ghz

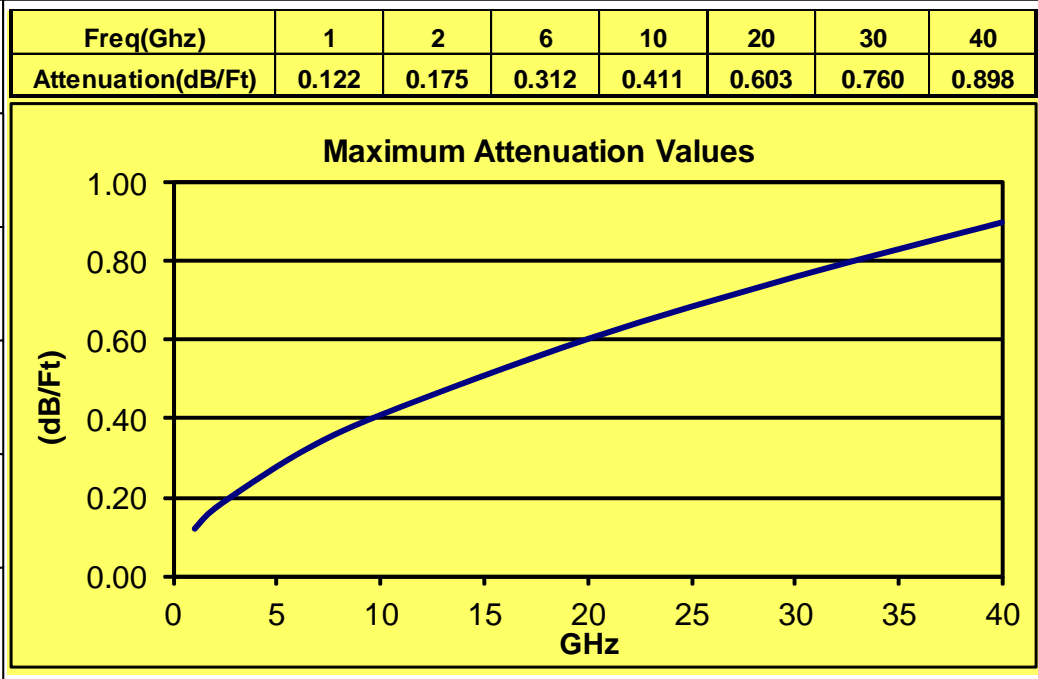

CABLE OVERVIEW

	PRODUCT LINE		SEMFLEX	
	DESCRIPTION			
DATE		2/17/2012		
DRAWN BY		J. Vidallon		
REVISED		11/29/2016		
SIZE	A	RoHS	COMPLIANT	DOCUMENT
Form#		1327 Rev: 1		WI-88164
			SHEET	1 OF 17