
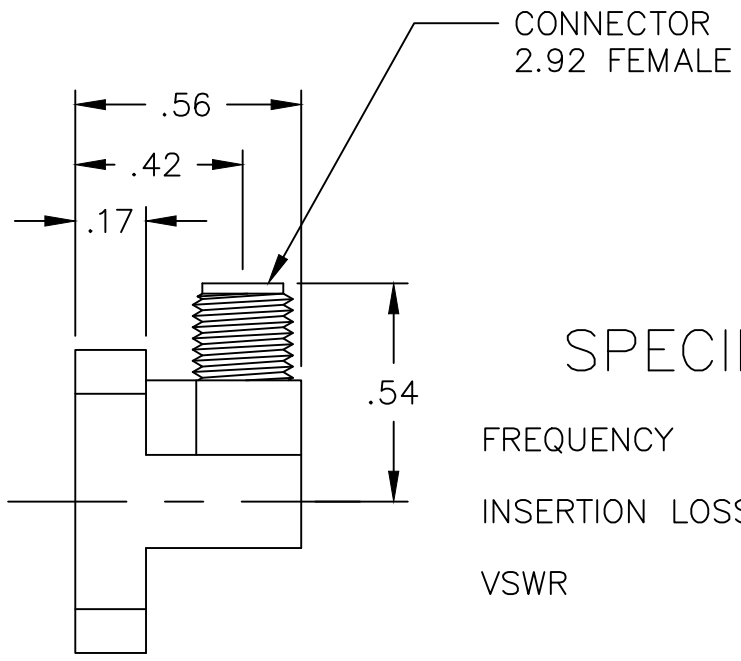


REVISION				
LTR	ECO	DESCRIPTION	DATE	APPROVED
N/C		RELEASED	9/2004	AKA

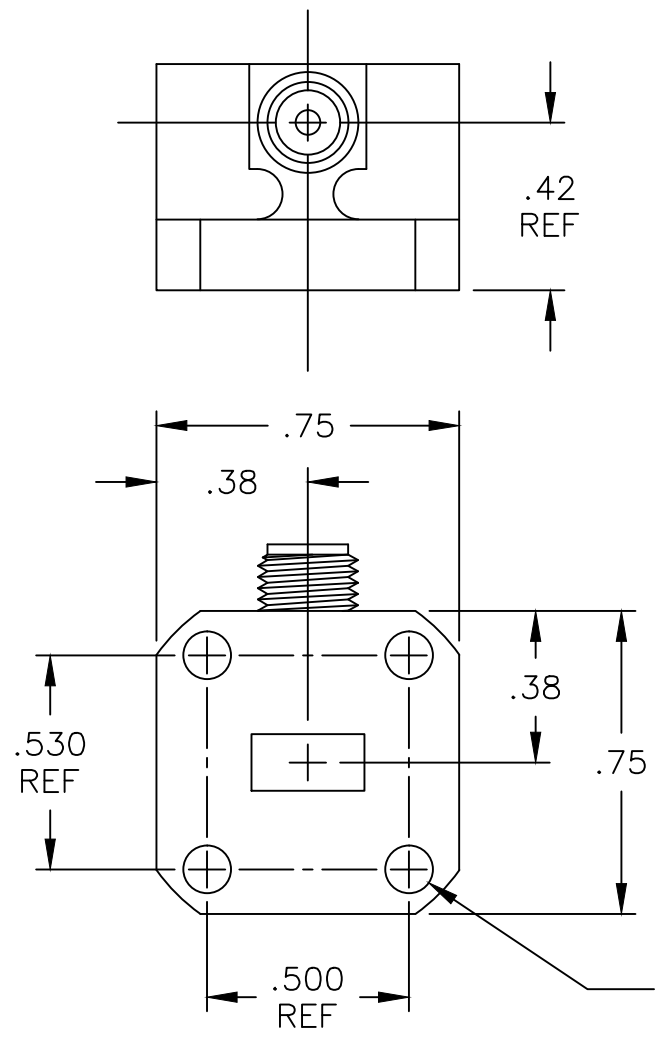

SPECIFICATIONS

FREQUENCY	26.5 – 40.0 GHz
INSERTION LOSS	0.15 dB MAX
VSWR	1.30:1 MAX

.116–.119 DIA THRU
4 PLACES
MATES WITH UG599/U FLANGE

OUTLINE DRAWING

3. FINISH: CHEMICAL FILM
PER MIL–C–5541.


2. MATERIAL: 6061–T6 ALUM ALLOY
PER QQ–A–200/8.

1. INTERPRET DRAWING
PER MIL–STD–100.

NOTES:

DIMENS. ARE IN INCHES
FRACT.±1/32 ANG±0°30'
TOL .XX±.02 .XXX±.010
DO NOT SCALE DRAWING

CONTR. NO
DRWN R. BOOTH 9/13/04
CHK
DSGN
ENG
QA K. ANDERSON 9/13/04
APPD

 M WAVE DESIGN Newbury Park, CA			
TITLE ADAPTER, WR28			
SIZE A	CODE IDENT 0M2Z7	PART NO. 28CA12.9F	
SCALE 2 X	WEIGHT N/A	SHEET 1 OF 1	